



IK110

INDOOR INTERACTIVE KIOSK



PRODUCT DETAILS



Split Screen



Remote Control



7Days
24Hours Running




Anti-theft Lock



Miracast



WIFI



Heat Dissipation



Multi-signal




Remote Monitoring



Customized

1. IPS PANEL

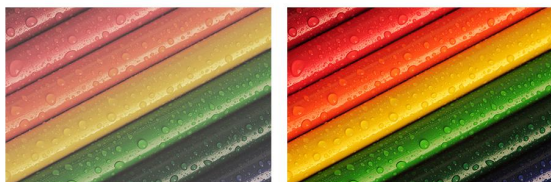

Industrial grade IPS technology accurately displays image quality and colour depth with no fall-off in colour accuracy.

2. 4K DISPLAY



The 4K Ultra HD display delivers incredible image quality with four times resolution higher than Full HD.

3. WIDE VIEWING ANGLE



These displays provide fantastic image quality with a remarkable viewing angle of 178° in both landscape and portrait.


4. SCROLLING TEXT



SALE NOW ON -30% OFF ALL CLOTHES-END TONIGHT-SALE NOW ON -30% OFF ALL

You can display a "ticker tapy" style scrolling text message along the bottom of the screen.

5. SURFACE PLASMA TREATMENT

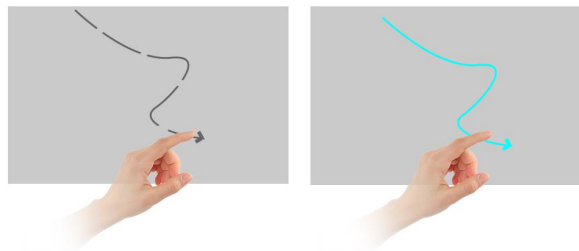

The oleophobic coating makes the glass front more resistance to oil and water residue left by fingerprint marks and makes touch gestures smoother.

6. 10 POINT PCAP / IR TOUCH

10
Touch Points



Manipulate images, zoom in an out as well as perform many other touch gestures; Multiple users interacting with the screen at one time.


7. INTEGRATED SPEAKERS



5w 8Ω ×2
Integrated speakers

Integrated with two stereo speakers for audio element requirement.

8. FREE SCHEDULING SOFTWARE

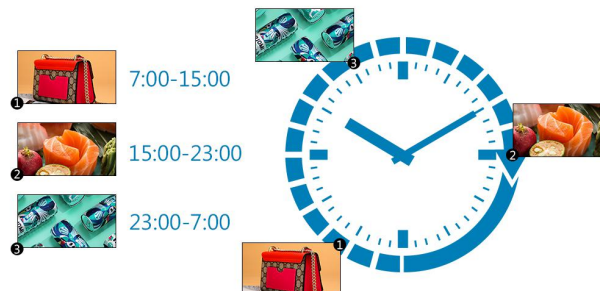

Playlist can be scheduled for displaying different content at different times of the day.

9. POWER TIMER



The screen can be set to automatic daily or weekly timing switches on and off.

10. 24/7 USAGE



The industrial grade panels are able to be in constant use 24/7 for over 60,000 hours.

11. ANDROID OR WINDOWS OS



Built-in Android 7.1 operating system and Windows 10 operating system options. You can also use your media player if required.

12. NETWORK REMOTE CONTROL



LAN, Wi-Fi, 4G network connection are available. The playlist can be remotely updated over the internet.

APPLICATION



QUALIFICATION CERTIFICATE

HONOR



PATENT



OUR ADVANTAGE



**11+ YEARS
OF EXPERIENCE**



**OEM & ODM
SERVICE**



**STRICT QUALITY
MANAGEMENT**




**R & D AND
PATENTED PRODUCTS**



**CE, FCC, ROHS
CERTIFICATION,**



**INTEGRATED
SERVICES**

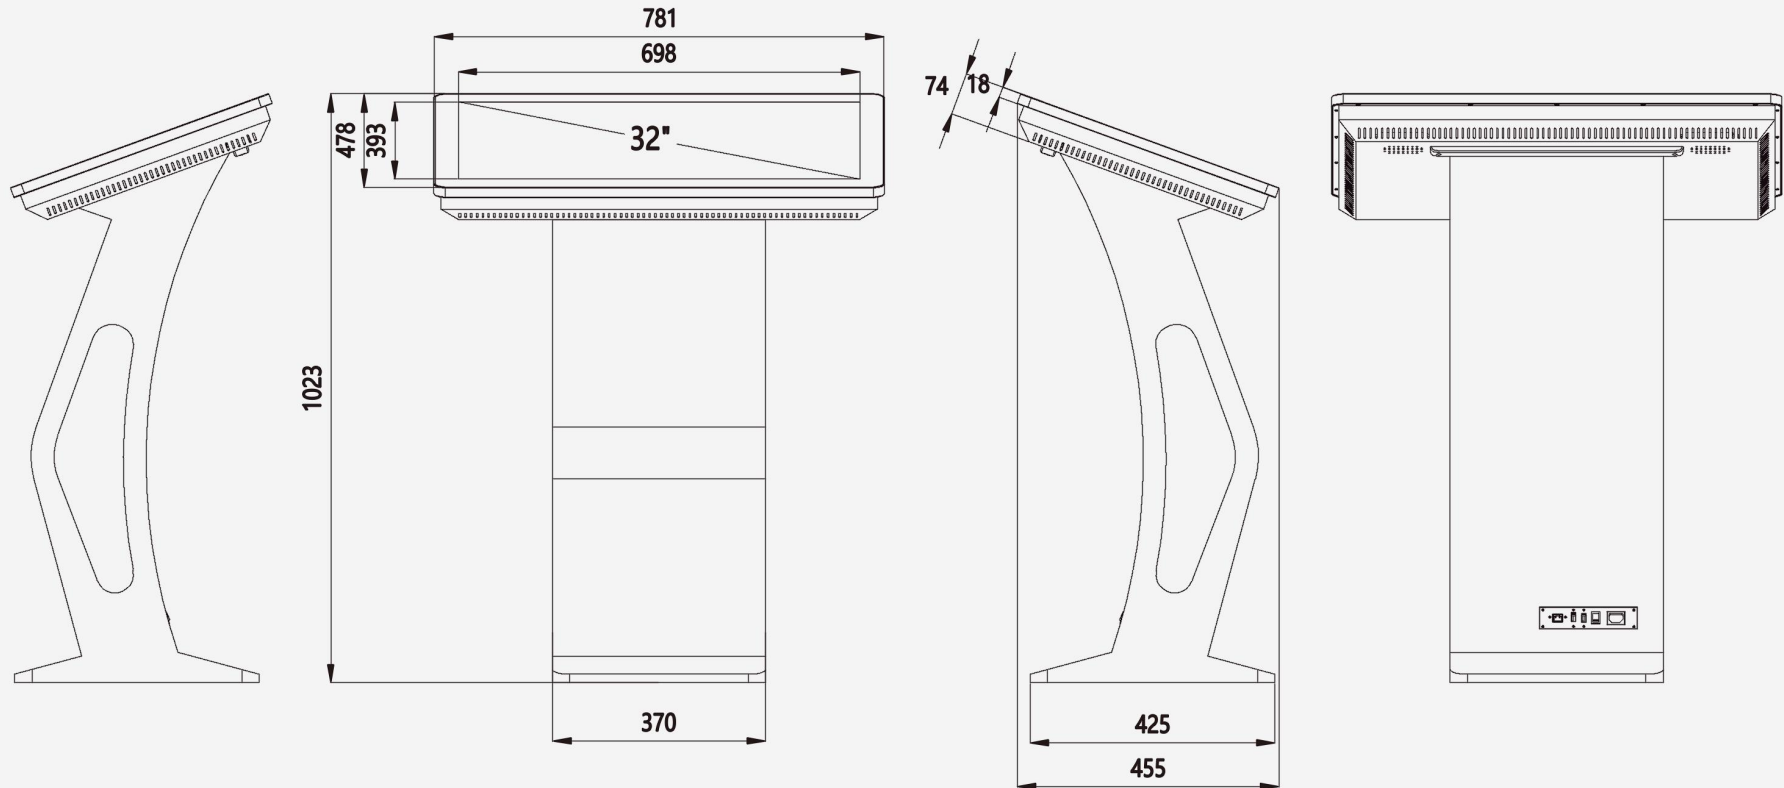SIZE 32"

OTHER AVAILABLE SIZES:
21.5" 27" 32" 43"

CONTENT
MANAGEMENT

DEVICE
MANAGEMENT

REMOTE
CONTROL

OTHER DESIGN OPTION



IK120



IK110



IK130



IK140

PACKING METHOD



- ① CARTON BOX
- ② WOODEN CASE



- ① FLIGHT CASE

SPECIFICATION

ITEM	DETAILS	TECHNICAL PARAMETERS			
Hardware data	Size	21.5inch	27inch	32inch	43inch
	Display area (mm)	476.064 × 267.786	597.888×336.312	698.4*392.85	941.1*529.4
	Resolution	1920x1080 / 3840x2160			
	Brightness	350 cd/m ² / 500 cd/m ² / 700 cd/m ² / 1000 cd/m ²			
	Viewing angle	178° (H) / 178° (V)			
	Contrast ratio	1400:1			
	Shell material	aluminum profile,metal plate,tempered safety glass			
Power supply	Spearker	2X8Ω5W			
	Switch power	110-240VAC@ 50/60Hz			
Power consumption	Max Power consumption	30W	35W	40W	55W

ITEM	DETAILS	TECHNICAL PARAMETERS
Android version	Motherboard	RK3288/ RK 3399
	CPU	Cores:4; Basic frequency:1.8 GHz, Cortex A17 / Dual Cortex-A72 big core+quad Cortex-A53 small core 64-bit CPU
	Operating System	Android 5.1/ 7.1
	Graphics	Integrated GPU ARM Mali-T764 / Quad core Arm mali-T860Mp4
	Memory	2G
	Storage	16G
	RJ45 LAN interface	100M/1000M
	USB	4 USB 2.0 / 2 USB 3.0
	Player Software	content management system
	Audio support	Intergrated
Windows version	Output interface	HDMI *1
	Motherboard	H110
	CPU	Intel i5 ≥6th generation(i3 & i7 for option)
	Operating System	Windows 10 Pro
	Graphics	Intel HD Graphics
	Memory	4G RAM
	Storage	120G SSD
	RJ45 LAN interface	100M/1000M
	USB	USB*1, SD card*1
	Player Software	To be specified by the client
	Audio support	Intergrated
	Output interface	HDMI*1, VGA*1

ITEM	DETAILS	TECHNICAL PARAMETERS
Standalone version	Motherboard	SX-260
	CPU	HD video decoding chip
	Operating System	uCOS
	Memory	DDR 128MB
	Storage	NAND Flash 16G
	Video format	MPEG1, MPEG2, MPEG4, H264, WMV
	USB	USB*1, SD card*1
Driver board version	Input interface	HDMI*1,USB*1
	USB	none
	Audio support	PC audio, earphone input
Application Environment	input interface	HDMI*1,VGA*1,DVI*1 / HDMI*1,DVI*1,VGA*1,DP*1
	Operating temperature	0°C ~ +40°C
	Storage temperature	-20°C ~ +60°C
	Humidity	10-80% RH Non-condensing
Options	WiFi access point	Yes
	Cellular router	3G or 4G
	Touchscreen	capacitive touch
	LED backlit company logo	Yes



GLOBAL 7X24 SERVICE



REMOTE TECHNICAL
SUPPORT



SUPPORT CUSTOMER'S
IMPORTANT ACTIVITIES



FREE TECHNICAL
TRAINING



VISIT VIP COUSTOMERS
REGULARLY



1 YEARS WARRANTY