








IS1900

INDOOR TOTEM CLASSIC

PRODUCT DISPLAY

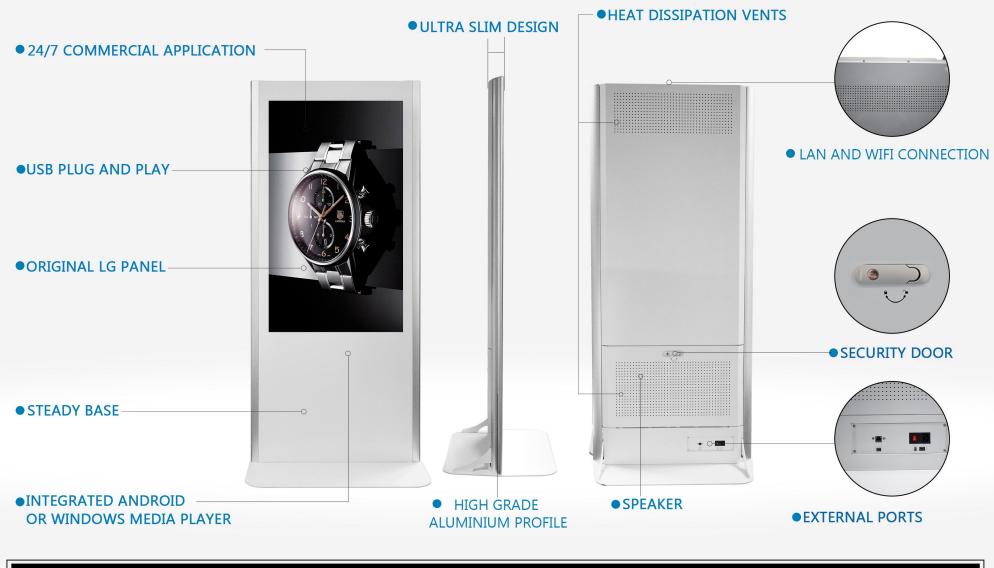





















Remote Control 7Days 24Hours Running

Anti-theft Lock

Miracast

Heat Dissipation

Multi-signal Remote Monitoring


Customized



Industrial grade IPS technology accurately displays image quality and colour depth with no fall-off in colour accuracy.



The pixel density or quantity of in each inch of this 4k new format the greater the pixel density is, the bigger the image's detail will be. Can bring the user more lifelike visual experience




These displays provide fantastic image quality with a remarkable viewing angle of 178° in both landscape and portrait.

4. SCROLLING TEXT



You can display a "ticker tapy" style scrolling text message along the bottom of the screen.

5. SURFACE PLASMA TREATMENT




The oleophobic coating makes the glass front more resistance to oil and water residue left by fingerprint marks and makes touch gestures smoother.

6. 10 POINT PCAP / IR TOUCH




Manipulate images, zoom in an out as well as perform many other touch gestures; Multiple users interacting with the screen at one time.





Integrated with two stereo speakers for audio element requirement.

8.FREE SCHEDULING SOFTWARE



Playlist can be scheduled for displaying different content at different times of the day.

9.POWER TIMER



The screen can be set to automatic daily o weekly timing switches on and off.

10. 24/7 USAGE



The industrial grade panels are able to be in constant use 24/7 for over 60,000 hours.

11.ANDROID OR WINDOWS OS



Built-in Android 7.1 operating system and Windows 10 operating system options. You can also use your media player if required.

12.NETWORK REMOTE CONTROL



LAN, Wi-Fi, 4G network connection are available. The playlist can be remotely updated over the internet.

APPLICATION
















HONOR

AUDITED SUPPLIER











PATENT
























SIZE 55"

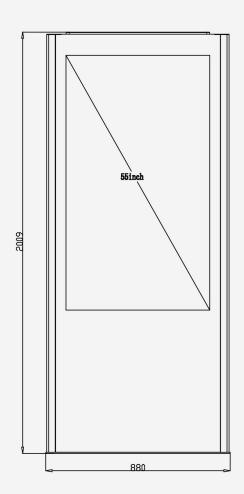

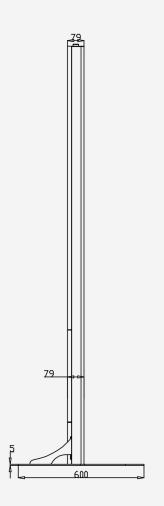

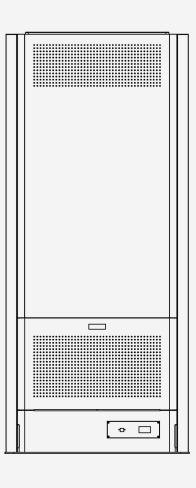

OTHER AVAILABLE SIZES: 32" 43" 49" 55"

CONTENT MANAGEMENT DEVICE MANAGEMENT REMOTE CONTROL









- 1 CARTON BOX
- **2** WOODEN CASE





1FLIGHT CASE




SPECIFICATION

ITEM	DETAILS	TECHNICAL PARAMETERS					
	Size	32inch	43inch	49inch	55inch	65inch	
	Display area (mm)	698.4*392.85	941.1*529.4	1084.8x610.2	1209.6x680.4	1428.48×803.52	
	Referent dimension(H*W*T mm)	1750*595*79	1850*725*79	1919*799*79	2010*870*75	2164*993*79	
	Resolution	1920x1080 / 3840x2160					
Hardware data	Brightness	$350 \text{ cd/m}^2 / 500 \text{ cd/m}^2 / 700 \text{ cd/m}^2 / 1000 \text{ cd/m}^2$					
	Viewing angle	178° (H) / 178° (V)					
	Contrast ratio	1400:1					
	Shell material	aluminum profile, metal plate, tempered safety glass					
	Spearker	2X8Ω5W					
Power supply	Switch power	110-240VAC@ 50/60Hz					
Power consumption	Max Power consumption	40W	55W	60W	80W	100W	

ITEM	DETAILS	TECHNICAL PARAMETERS		
	Motherboard	RK3288/ RK 3399		
	CPU	Cores:4; Basic frequency:1.8 GHz ,Cortex A17 / Dual Cortex-A72 big core+quad Cortex-A53 small core 64-bit CPU		
	Operating System	Android 5.1/ 7.1		
	Graphics	Integrated GPU ARM Mali-T764 / Quad core Arm mali-T860Mp4		
	Memory	2G		
Android version	Storage	16G		
	RJ45 LAN interface 100M/1000M			
	USB	4 USB 2.0 / 2 USB 3.0		
	Player Software	content management system		
	Audio support	Intergrated		
	Output interface	HDMI *1		
	Motherboard	H110		
	CPU	Intel i5 ≥6th generation(i3 & i7 for option)		
	Operating System	Windows 10 Pro		
	Graphics	Intel HD Graphics		
	Memory	4G RAM		
Windows version	Storage	120G SSD		
Williadws Version	RJ45 LAN interface	100M/1000M		
	USB	USB*1, SD card*1		
	Player Software	To be specified by the client		
	Audio support	Intergrated		
	Output interface	HDMI*1, VGA*1		

ITEM	DETAILS	TECHNICAL PARAMETERS	
	Motherboard	SX-260	
	CPU	HD video decoding chip	
	Operating System	uCOS	
	Memory	DDR 128MB	
Standalone	Storage	NAND Flash 16G	
version	Video format	MPEG1, MPEG2, MPEG4, H264, WMV	
	USB	USB*1, SD card*1	
	Input interface	HDMI*1,USB*1	
	USB	none	
Driver board version	Audio support	PC audio, earphone input	
Dodra version	input interface	HDMI*1,VGA*1,DVI*1 / HDMI*1,DVI*1,VGA*1,DP*1	
	Operating temperature	0° C \sim +40 $^{\circ}$ C	
Application	Storage temperature	-20°C ∼ +60°C	
Environment	Humidity	10-80% RH Non-condensing	
	WiFi access point	Yes	
Options	Cellular router	3G or 4G	
Options	Touchscreen	capacitive touch	
	LED backlit company logo	Yes	



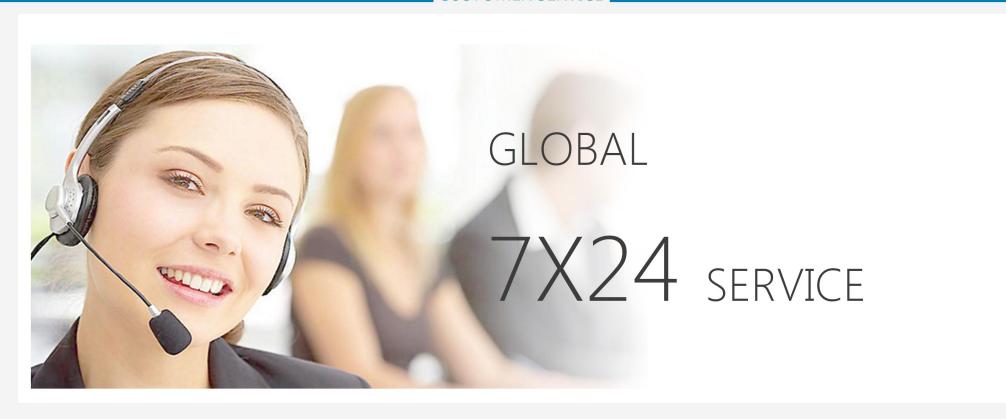



REMOTE TECHNICAL SUPPORT

