






OUTDOOR DUAL SIDED KIOSK



KEY FEATURES

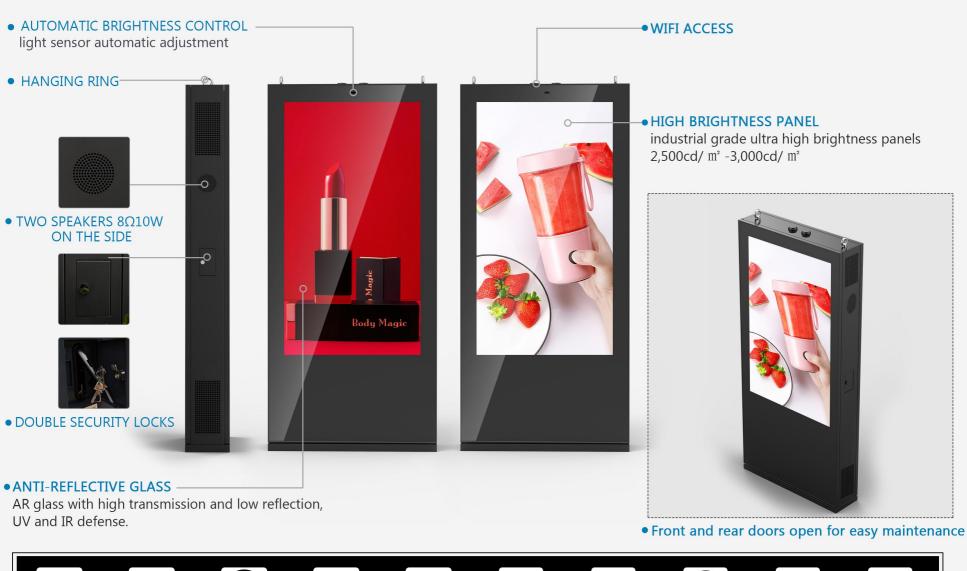











3000cd/m²

Industrial grade ultra high brightness panels 2,500cd/ m^2 -3,000cd/ m^2 can be easily readable in bright weather conditions.

4. TEMPERATURE CONTROL SYSTEM










Air cooling system allow the display to work in environment -20°~40°, Air conditioning allow the display to work in any climate -30°~50°.

2.ANTI REFLECTIVE GLASS




AR glass with high transmission and low reflection. Almost 100% of UV is blocked and IR transmission significantly reduced.

5.VANDAL-PROOF



The enclosure is made from steel sheet and toughened safety glass. All controls and inputs are hidden and not accessible to passers-by to avoid tampering.

3.AMBIENT LIGHT SENSOR



Light sensor change the screen's brightness depending on the ambient light ensuring the most suitable brightness at any time of the day.

6 .IP65 RATED ENCLOSURE

IP65

protected against dust that may harm equipment.

water resistance

dust resistance

5 protected against water spray from all directions

The display with IP65 rating is able to withstand all wet weather conditions and keep out airborne dust.

7.INTEGRATED SPEAKERS



 $10w \ 8\Omega \times 2$ Integrated speakers


Integrated with two stereo speakers for audio element requirement.

10. 24/7 USAGE



The industrial grade panels are able to be in constant use 24/7 for over 60,000 hours.

8.ENVIRONMENT MONITORING



Equiped with full set of monitoring sensors and remote control app for operating environment monitoring.

11.ANDROID OR WINDOWS OS



Built-in Android 7.1 operating system and Windows 10 operating system options. You can also use your media player if required.

9.FAILURE ALARM



When something goes wrong with the kiosk, the alarm will be issued and an email notification will be sent automatically.

12.NETWORK REMOTE CONTROL



LAN, Wi-Fi, 4G network connection are available. The playlist can be remotely updated over the internet.

PRODUCT TEST










PRODUCT TEST









APPLICATION












SPECIFICATION

ITEM	DETAILS	TECHNICAL PARAMETERS				
Hardware data	Size	55inch	65inch	75inch	86inch	
	Display area (mm)	1209.6x680.4	1428.48×803.52	1650*928	1922.2*1093.2	
	Resolution	1920x1080 / 3840x2160				
	Brightness	3000 cd/m ²				
	Viewing angle	178° (H) / 178° (V)				
	Contrast ratio	1300:1				
	Dust poof&Water proof	IP55/IP65				
	Brightness Control	Light sensor				
	Temperature Control System	Air cooling system / Air conditioning				
Power supply	Switch power	110/240VAC@ 50/60Hz				
Power consumption	Max Power consumption	940W with fans (2.4KW with air conditioner)	1.1KW with fans (2.6KW with air conditioner)	1.3KW with fans (2.8KW with air conditioner)	1.3KW with fans (2.8KW with air conditioner)	

I I EM	DETAILS	TECHNICAL PARAMETERS
	Motherboard	RK3288/ RK 3399
	CPU	Cores:4; Basic frequency:1.8 GHz ,Cortex A17 / Dual Cortex-A72 big core+quad Cortex-A53 small core 64-bit CPU
	Operating System	Android 5.1/ 7.1
	Graphics	Integrated GPU ARM Mali-T764 / Quad core Arm mali-T860Mp4
	Memory	4G
Android version	Storage	32G
	RJ45 LAN interface	100M/1000M
	USB	4 USB 2.0 / 2 USB 3.0
	Player Software	content management system
	Audio support	Intergrated
	Output interface	HDMI *1
	Motherboard	H310
	CPU	Intel i5 6th / i7 6th
	Operating System	Windows 10
	Graphics	Intel HD Graphics
	Memory	4G RAM / 8G RAM
Windows version	Storage	120G SSD / 256G SSD
7711140715 70151011	RJ45 LAN interface	100M/1000M
	USB	USB*1, SD card*1
	Audio support	Intergrated
	Output interface	HDMI*1, VGA*1

ITEM	DETAILS	TECHNICAL PARAMETERS
	Motherboard	SX-260
	CPU	HD video decoding chip
	Operating System	uCOS
	Memory	DDR 128MB
Standalone	Storage	NAND Flash 16G
version	Video format	MPEG1, MPEG2, MPEG4, H264, WMV
	USB	USB*1, SD card*1
	Input interface	HDMI*1,USB*1
	USB	none
Driver board version	Audio support	PC audio, earphone input
board version	input interface	HDMI*1,VGA*1,DVI*1 / HDMI*1,DVI*1,VGA*1,DP*1
	Operating temperature	'-20°C \sim +40°C with fans , -30°C \sim +50°C with air conditioner
Application	Storage temperature	'-20°C ~ +60°C
Environment	Humidity	10-80% RH Non-condensing
	WiFi access point	Yes
Options	Cellular router	3G or 4G
Options	Touchscreen	capacitive touch
	LED backlit company logo	Yes

PRODUCT SIZE

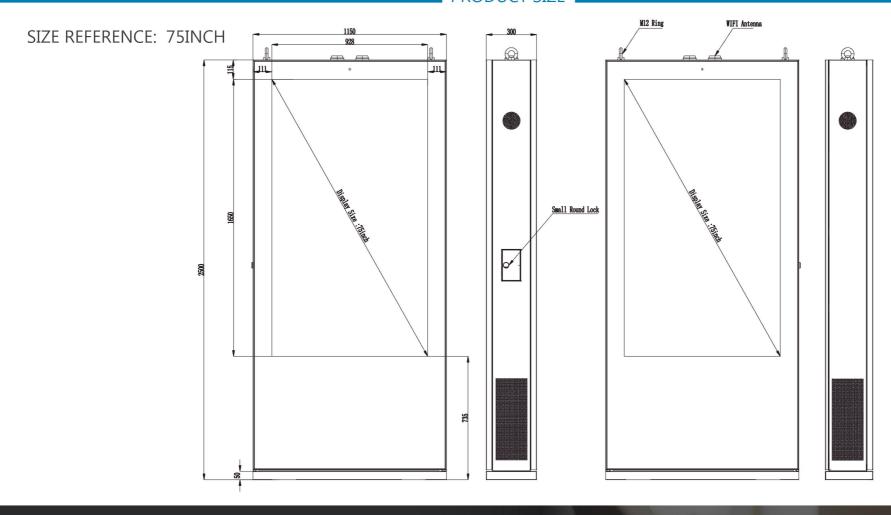

OTHER AVAILABLE SIZES: 55" 65" 75" 86"

CONTENT MANAGEMENT DEVICE MANAGEMENT REMOTE CONTROL





11+ YEARS OF EXPERIENCE



R & D AND PATENTED PRODUCTS



OEM & ODM SERVICE



CE, FCC,ROHS CERTIFICATION,



STRICT QUALITY MANAGEMENT



INTEGRATED SERVICES









- 1 CARTON BOX
- **2** WOODEN CASE





1 FLIGHT CASE



HONOR

AUDITED SUPPLIER











PATENT















OTHER DESIGN OPTIONS I





















F130P

JP120P



GLOBAL

7X24 SERVICE



REMOTE TECHNICAL SUPPORT



SUPPORT CUSTOMER'S IMPORTANT ACTIVITIES



FREE TECHNICAL TRAINNING



VISIT VIP COUSTOMERS
REGULARLY



1 YEARS WARRANTY