




R600P

OUTDOOR DUAL SIDED KIOSK

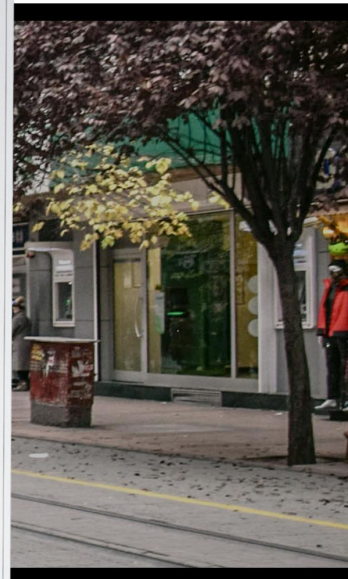

KEY FEATURES

- **AUTOMATIC BRIGHTNESS CONTROL**
light sensor automatic adjustment

- **LED LIGHTS**

- **TWO SPEAKERS 8Ω10W ON THE SIDE**

- **ANTI-THEFT LOCK**

- **CAMERA**

- **LCD TOUCH SCREEN**

- **SOS**

- **USB INTERFACE**

- **HEAT DISSIPATION**

- **ANTI-REFLECTIVE GLASS**

AR glass with high transmission and low reflection, UV and IR defense.

- **HANGING RING**

- **HEAT DISSIPATION**

- **HIGH BRIGHTNESS PANEL**

industrial grade ultra high brightness panels
2,500cd/ m² -3,000cd/ m²



- **Front and rear doors open for easy maintenance**



Split Screen



Remote Control



7Days
24Hours Running



Anti-theft Lock



Miracast



WIFI



Heat Dissipation



Multi-signal



Remote Monitoring



Customized


1.DIRECT SUNLIGHT READBLE



3000cd/m²


Industrial grade ultra high brightness panels 2,500cd/ m² -3,000cd/ m² can be easily readable in bright weather conditions.

2.ANTI REFLECTIVE GLASS





AR glass with high transmission and low reflection. Almost 100% of UV is blocked and IR transmission significantly reduced.

3.AMBIENT LIGHT SENSOR

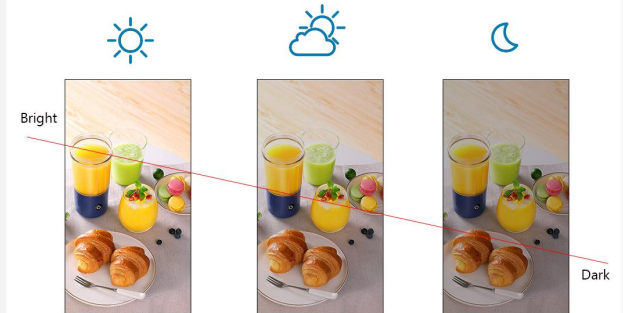

Light sensor change the screen' s brightness depending on the ambient light ensuring the most suitable brightness at any time of the day.

4. TEMPERATURE CONTROL SYSTEM




Air cooling system allow the display to work in environment -20°~40°, Air conditioning allow the display to work in any climate -30°~50°.

5.VANDAL-PROOF



6mm toughened glass



The enclosure is made from steel sheet and toughened safety glass. All controls and inputs are hidden and not accessible to passers-by to avoid tampering.

6 .IP65 RATED ENCLOSURE

IP65

dust resistance

6 protected against dust that may harm equipment.

water resistance

5 protected against water spray from all directions

The display with IP65 rating is able to withstand all wet weather conditions and keep out airborne dust.

PRODUCT FEATURES


7. INTEGRATED SPEAKERS



10w $8\Omega \times 2$
Integrated speakers


Integrated with two stereo speakers for audio element requirement.

8. FREE SCHEDULING SOFTWARE

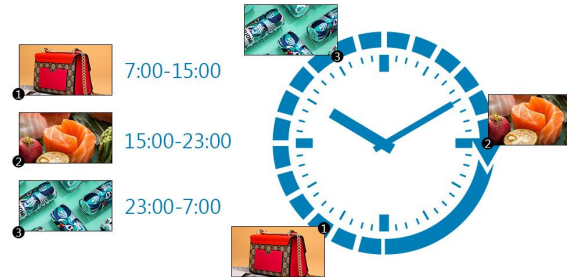

Playlist can be scheduled for displaying different content at different times of the day.

9. POWER TIMER




The screen can be set to automatic daily or weekly timing switches on and off.

10. 24/7 USAGE



The industrial grade panels are able to be in constant use 24/7 for over 60,000 hours.

11. ANDROID OR WINDOWS OS

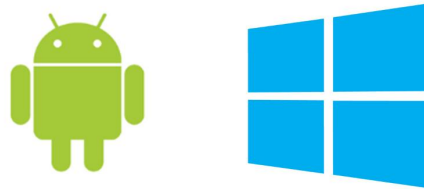

Built-in Android 7.1 operating system and Windows 10 operating system options. You can also use your media player if required.

12. NETWORK REMOTE CONTROL





LAN, Wi-Fi, 4G network connection are available. The playlist can be remotely updated over the internet.


WATERPROOF TESTING

WATERPROOF TEST:

Time: at least 3 minutes for each outdoor display in laboratory
Aim: to prove that according to IPX5 requirement, no water into outdoor display under multi-angle water spray.

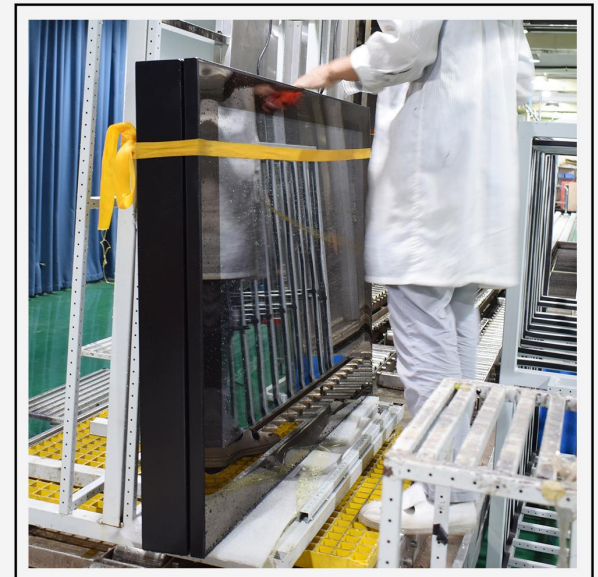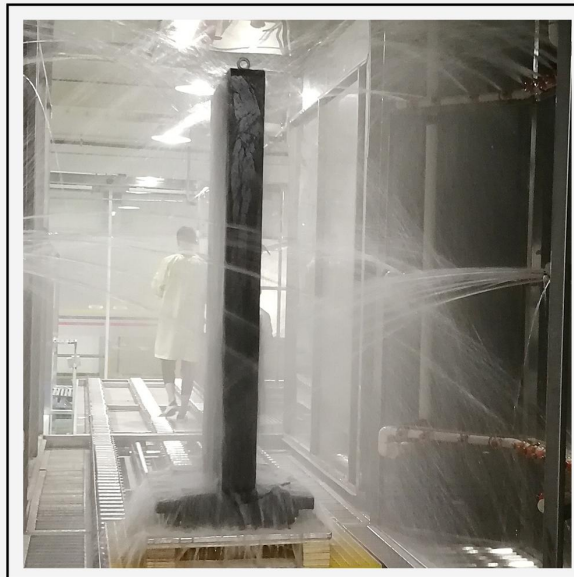

UV TESTING

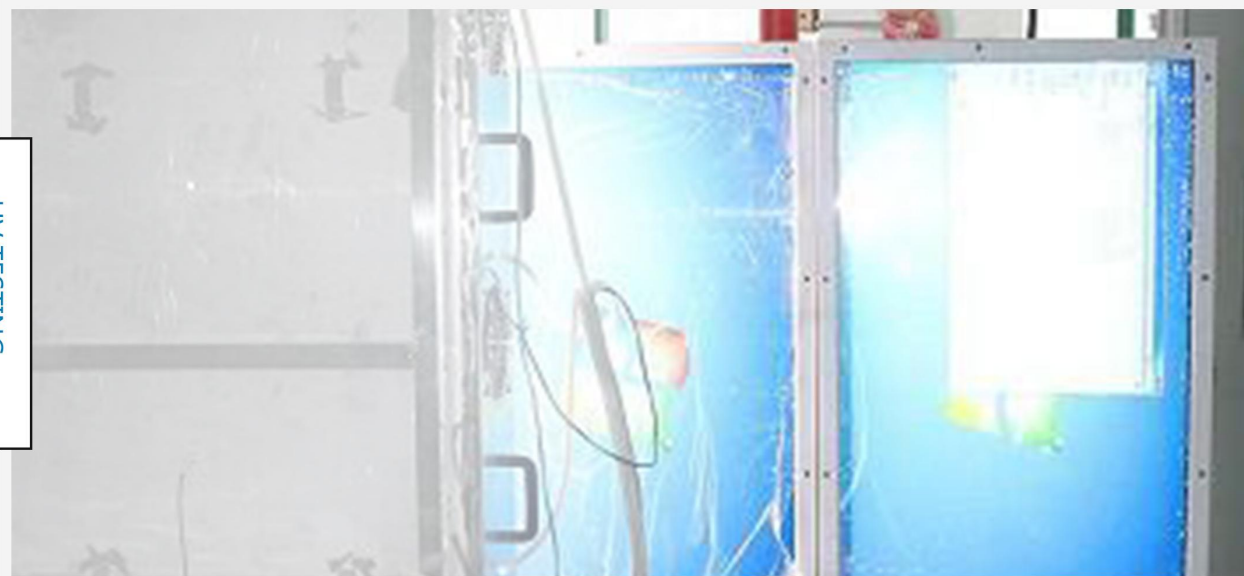**UV TEST:**

Time: at least 1 hour for each outdoor display in laboratory
Aim: to prove that outdoor display works well under direct sunlight.

TEMPERATURE TEST:

Time: at least 1 hour for each outdoor display in laboratory
Highest Temperature: +60 °C
Lowest Temperature: -20 °C
Aim: to prove that outdoor display works perfectly under extreme temperature.



SPECIFICATION

ITEM	DETAILS	TECHNICAL PARAMETERS			
Hardware data	Size	55inch	65inch	75inch	86inch
	Display area (mm)	1209.6x680.4	1428.48x803.52	1650*928	1922.2*1093.2
	Resolution	1920x1080 / 3840x2160			
	Brightness	3000 cd/m ²			
	Viewing angle	178° (H) / 178° (V)			
	Contrast ratio	1300:1			
	Dust poof&Water proof	IP55/IP65			
	Brightness Control	Light sensor			
Power supply	Temperature Control System	Air cooling system / Air conditioning			
	Switch power	110/240VAC@ 50/60Hz			
Power consumption	Max Power consumption	940W with fans (2.4KW with air conditioner)	1.1KW with fans (2.6KW with air conditioner)	1.3KW with fans (2.8KW with air conditioner)	1.3KW with fans (2.8KW with air conditioner)

ITEM	DETAILS	TECHNICAL PARAMETERS
Android version	Motherboard	RK3288/ RK 3399
	CPU	Cores:4; Basic frequency:1.8 GHz, Cortex A17 / Dual Cortex-A72 big core+quad Cortex-A53 small core 64-bit CPU
	Operating System	Android 5.1/ 7.1
	Graphics	Integrated GPU ARM Mali-T764 / Quad core Arm mali-T860Mp4
	Memory	4G
	Storage	32G
	RJ45 LAN interface	100M/1000M
	USB	4 USB 2.0 / 2 USB 3.0
	Player Software	content management system
	Audio support	Intergrated
Windows version	Output interface	HDMI *1
	Motherboard	H310
	CPU	Intel i5 6th / i7 6th
	Operating System	Windows 10
	Graphics	Intel HD Graphics
	Memory	4G RAM / 8G RAM
	Storage	120G SSD / 256G SSD
	RJ45 LAN interface	100M/1000M
	USB	USB*1, SD card*1
	Audio support	Intergrated
	Output interface	HDMI*1, VGA*1

ITEM	DETAILS	TECHNICAL PARAMETERS
Standalone version	Motherboard	SX-260
	CPU	HD video decoding chip
	Operating System	uCOS
	Memory	DDR 128MB
	Storage	NAND Flash 16G
	Video format	MPEG1, MPEG2, MPEG4, H264, WMV
	USB	USB*1, SD card*1
Driver board version	Input interface	HDMI*1,USB*1
	USB	none
	Audio support	PC audio, earphone input
Application Environment	input interface	HDMI*1,VGA*1,DVI*1 / HDMI*1,DVI*1,VGA*1,DP*1
	Operating temperature	'-20°C ~ +40°C with fans , -30°C ~ +50°C with air conditioner
	Storage temperature	'-20°C ~ +60°C
	Humidity	10-80% RH Non-condensing
Options	WiFi access point	Yes
	Cellular router	3G or 4G
	Touchscreen	capacitive touch
	LED backlit company logo	Yes

Technical drawings of the 55-inch TV, including front, side, and top views with dimensions.

Front View: The screen is 55" diagonal. The overall width is 863.7 mm and the height is 1209.6 mm. The top bezel is 320.2 mm high. The bottom bezel is 2650 mm high. The bottom bezel features a circular logo, a Wi-Fi symbol, a circular speaker grille, and a rectangular display area.

Side View: The side bezel is 320 mm wide. It features a circular logo, a Wi-Fi symbol, and a circular speaker grille.

Top View: The top bezel is 710.9 mm wide. It features a circular logo, a Wi-Fi symbol, a circular speaker grille, and a rectangular display area. The top bezel is 320 mm high. The top bezel features a circular logo, a Wi-Fi symbol, a circular speaker grille, and a rectangular display area.

REMOTE CONTROL

APPLICATION



OUR ADVANTAGE



**11+ YEARS
OF EXPERIENCE**



**OEM & ODM
SERVICE**



**STRICT QUALITY
MANAGEMENT**



**R & D AND
PATENTED PRODUCTS**




**CE, FCC, ROHS
CERTIFICATION,**



**INTEGRATED
SERVICES**

PACKING METHOD

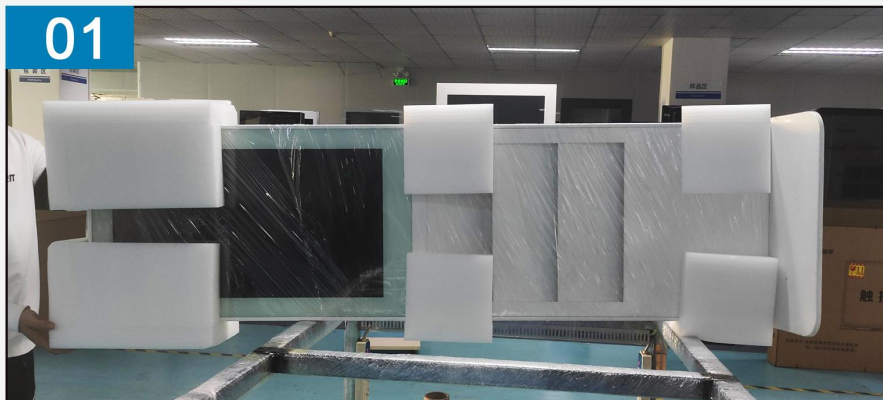

- ① CARTON BOX
- ② WOODEN CASE




- ① FLIGHT CASE

QUALIFICATION CERTIFICATE

HONOR



PATENT

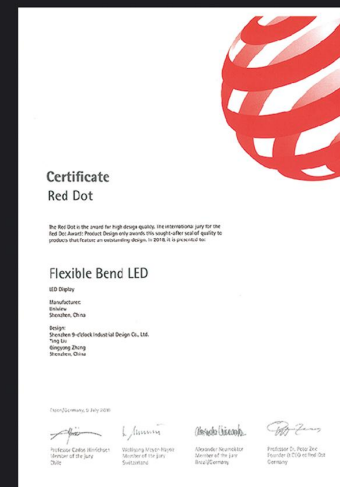


OTHER DESIGN OPTIONS



ST500



F110P

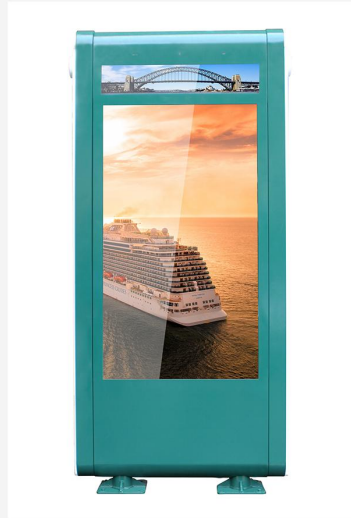

ST600



R600P




D700P



L800P




JP120L

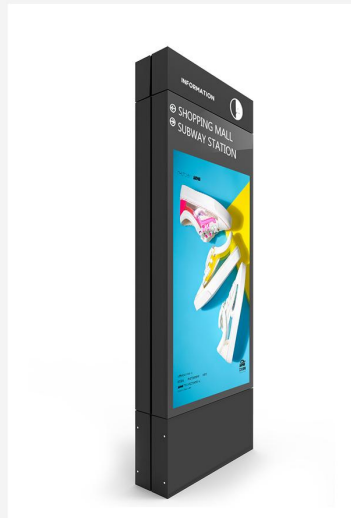

UO200P



F130P

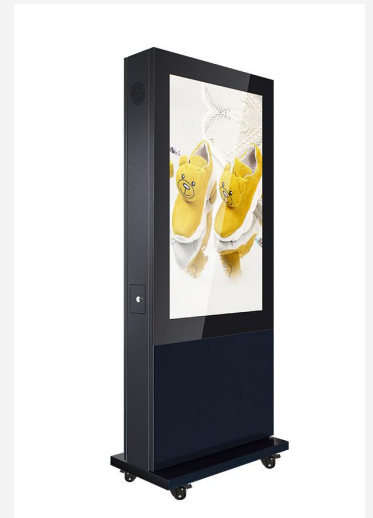

JP120P



GLOBAL
7X24 SERVICE



REMOTE TECHNICAL
SUPPORT



SUPPORT CUSTOMER'S
IMPORTANT ACTIVITIES



FREE TECHNICAL
TRAINING



VISIT VIP COUSTOMERS
REGULARLY



1 YEARS WARRANTY