


86"

**86INCH LCD
OUTDOOR ADVERTISING
TOTEM-LANDSCAPE**



PRODUCT DETAIL

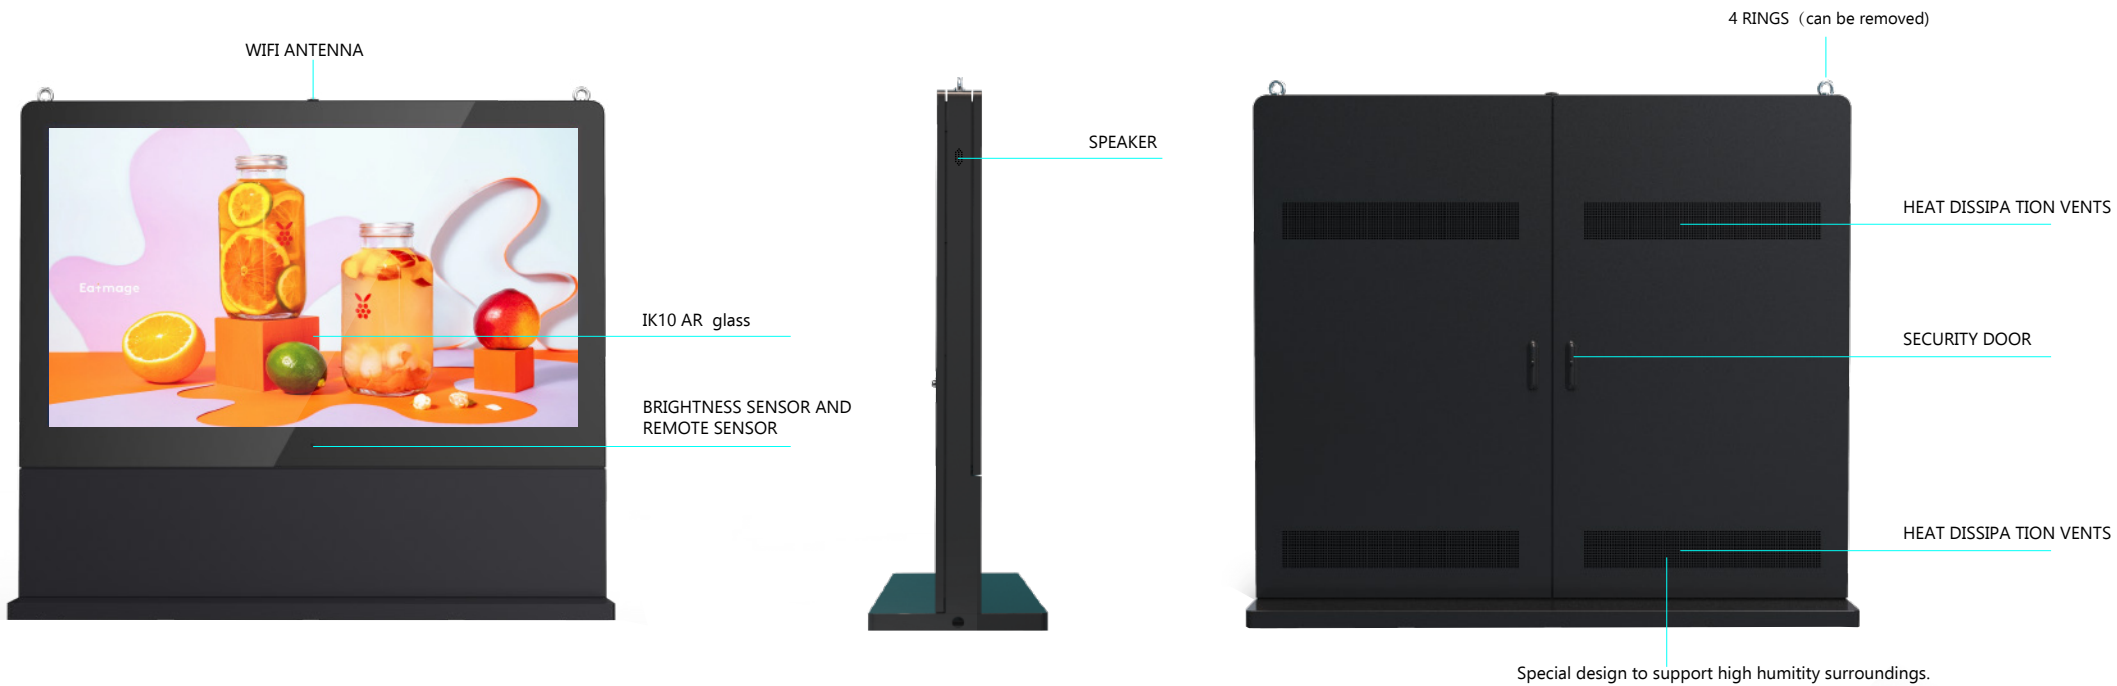

PRODUCT FEATURES



Work Rain or Shine

Sealed with an IP55/65 fully enclosed module, outdoor display can insulate from elements such as dust, and rain. They can cope with various changes in external weather conditions and ensure smooth operation.



Intelligent Brightness Control

The higher the brightness, the greater the energy consumption. It is very important to find the right display brightness for your application. outdoor signage embedded light sensors can automatically adjust the display brightness to the most suitable level based on ambient illumination for a better viewing experience and reduction of unnecessary energy consumption.



Born with Armor


The display enclosure consists of steel sheets and toughened safety glass, providing IK 10 protection which prevents your facilities from vandalism. Collocate with a specially-made security lock, all controls and inputs are hidden and cannot be accessed by irrelevant personnel.



High-Definition Display

Outdoor digital signage also realizes high brightness and resolution display which draws consumers' attention even from a long distance. Equipped with AR front glass, it provides clear and vivid images under direct sunlight.

PRODUCT SIZE DRAWING

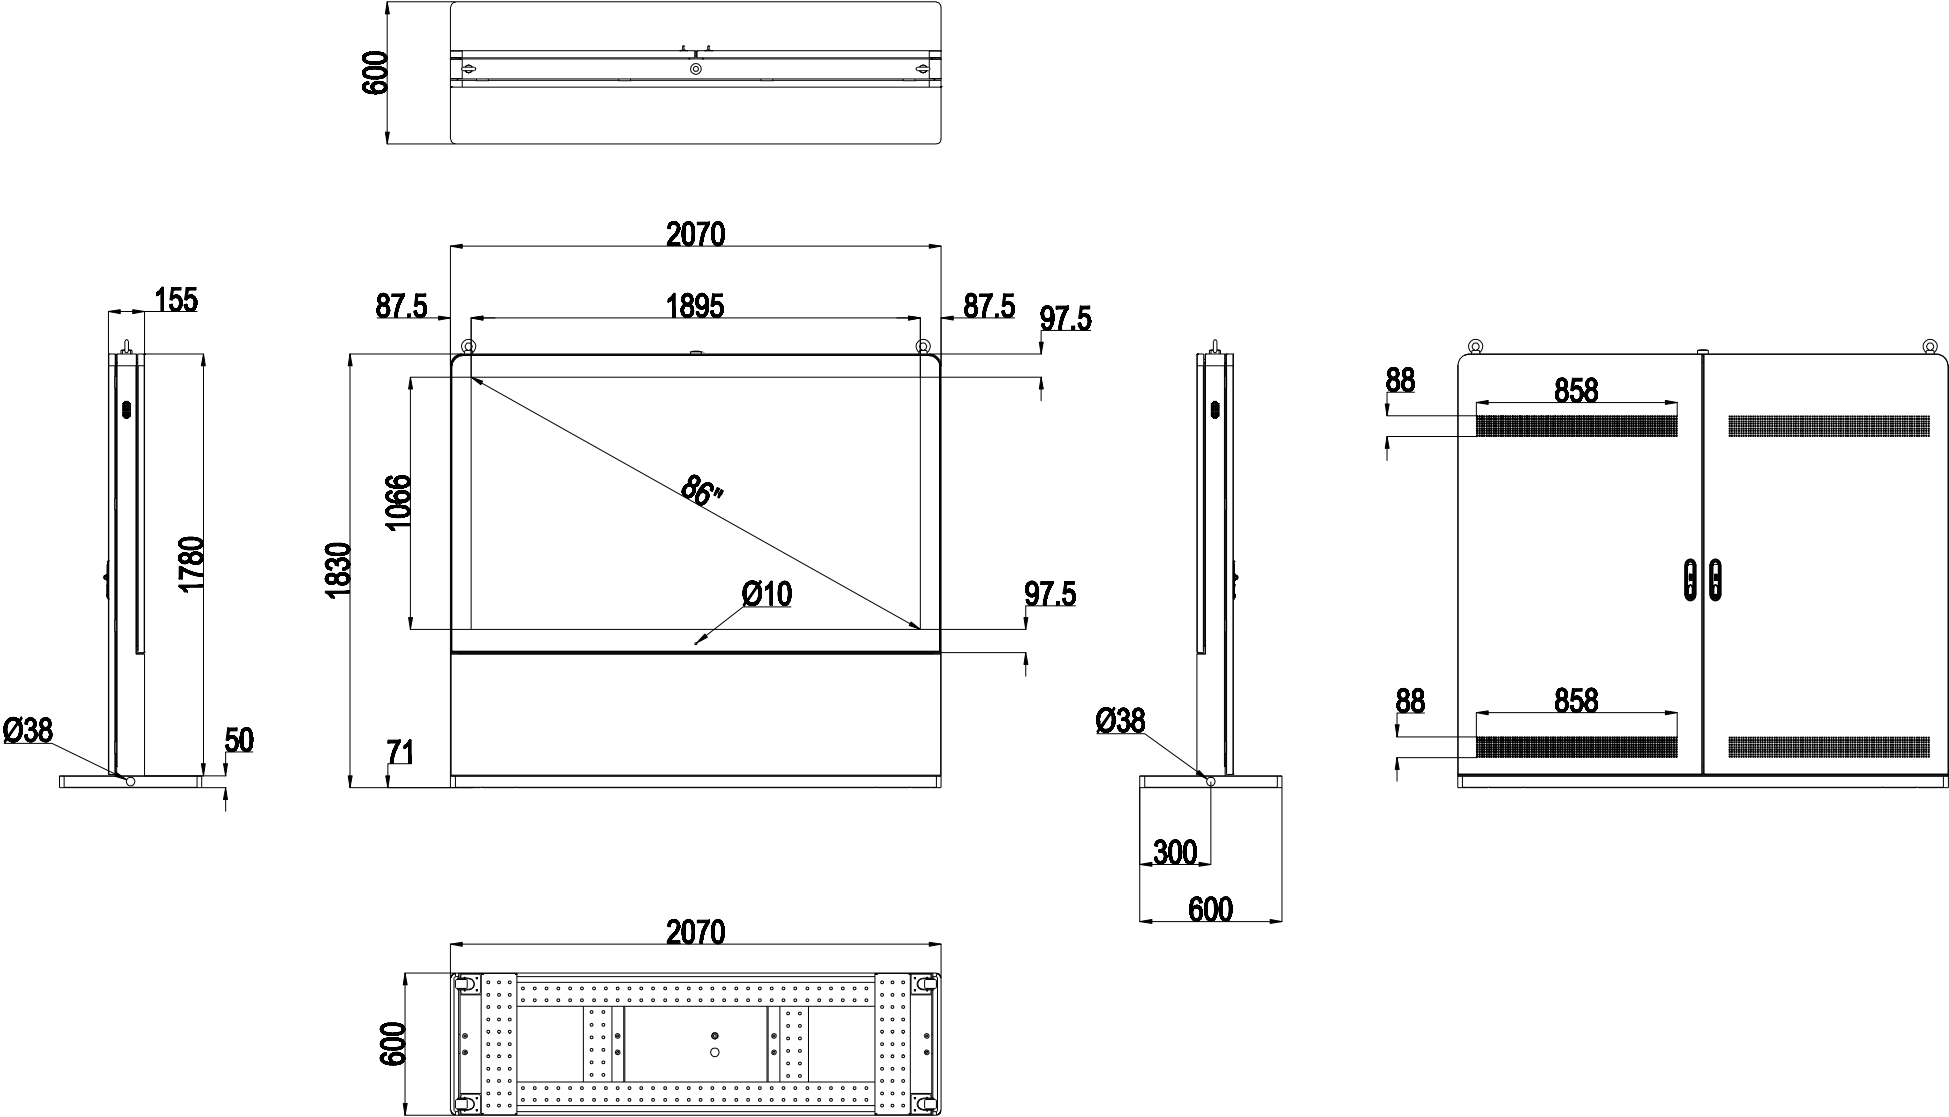

PRODUCT SPECIFICATIONS

Technical Parameters					
Panel				Power	
Product model	F130L-86			Power supply	AC/90-240V, 50/60Hz
Panel size	86 inch	Panel type	LCD with LED backlight	Referent Power consumption	≈1500W (based on Fan cooling solution with heater)
Pixel(mm)	0.4935*0.4935	Contrast ratio	1400:1		
Brightness	2500nits	Response time	6 ms		
Resolution	3840*2160P	Lifespan	50000~60000 hour	Working enviornment	Outdoor
Viewing angle	178°(H) / 178°(V)	Display mode	16:9	Working temperature	−20℃~+45℃ for Fan cooling
Enclosure				Working humidity	10% ~ 90% RH
Protection grade	IP55 with Fan Cooling			Operating System	
Impact resistance	Tempered safety glass with Anti-reflection coating			Operate System	Android 11.0
Brightness control	Auto djust by light sensor			Motherboard	Huidu RK3399
Electron timer	Support			Storage	4G+ 16G
Electric safety	Safety air switch, surge protective device			Stereo speakers	2X 8Ω,10W
Speaker	2X8Ω/10W speakers			Network connection	LAN, WiFi, support 4G moudule
Structure	Galvanized steel + zinc powder coating + fine grain powder triple coating, Anti-corrosion, Anti-Wind, Anti-Theif, Anti-explosion, Anti-Thunder, Anti-rust.			Internal Interface	DC, HDMI , USB2.0, USB3.0, MIC, Jack, Audio, RJ45
Glass	IK10 AR glass			Packing	
Filter	With high efficient maintainence filter			Measurement(mm)	1963*2070*155mm(kiosk) 2280*650*2040mm(wooden case)
Color	Options,Refer to the RAL Color with Akzonobel powder coating			Weight(KGS)	N.W.: 360kgs G.W.: 470kgs(wooden case packing)

PACKAGE OPTION







Wooden case



Flightbox case

Quality Insurance

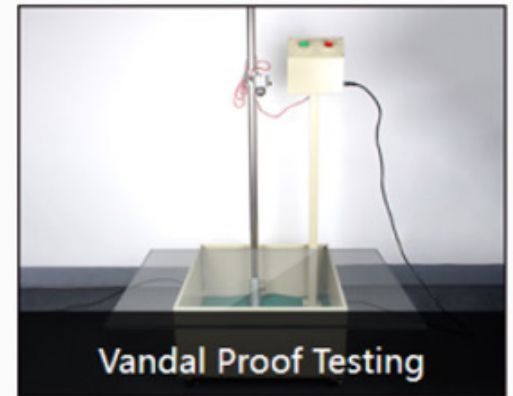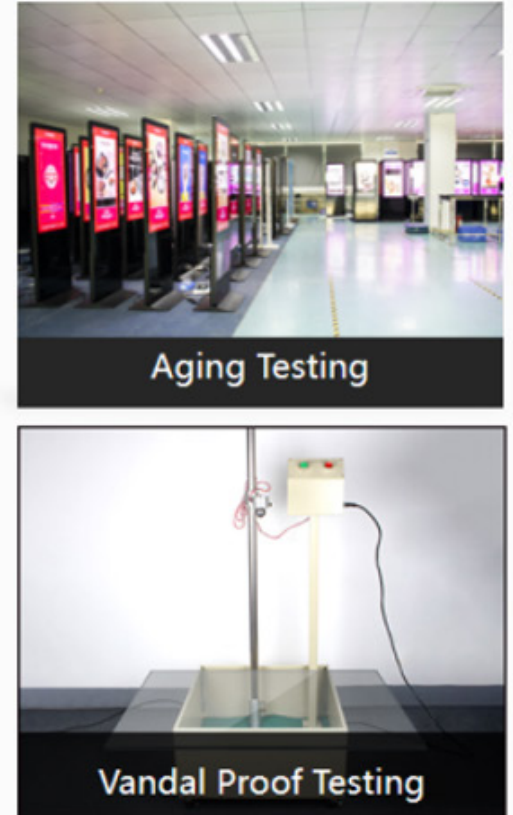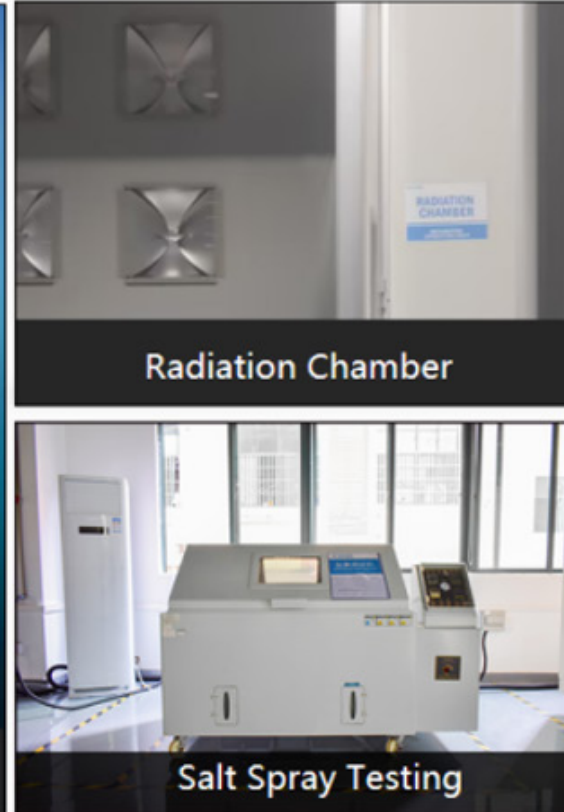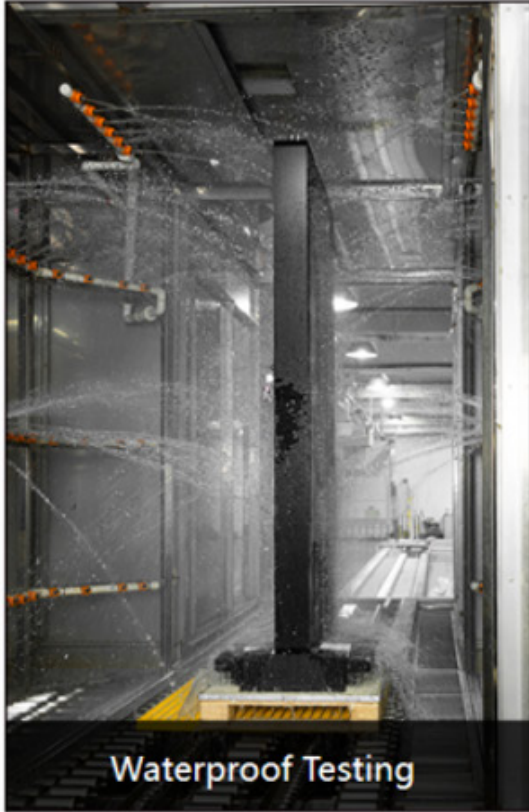

PRODUCTION PROCESS



CASE STUDY

