

OUTSTANDING VISIBILITY WITH HIGH RELIABILITY

Boasting a high brightness of 2500-3,000 nits, captures the attention of passersby even under direct sunlight. It can adapt to various harsh outdoor environments, such as waterproof, dust-proof, lightning-proof, anti-corrosion, etc. the display will stably deliver eye-catching content for as long as you need it to.



KEY FEATURES

- **AUTOMATIC BRIGHTNESS CONTROL**

Light sensor automatic adjustment



- **TWO SPEAKERS 8Ω 10W ON THE SIDE**



- **HDMI & USB CONNECTOR**



- **ANTI-REFLECTIVE GLASS**

AR glass with high transmission and low reflection, UV and IR defense.




- **HIGH BRIGHTNESS PANEL**

Industrial grade ultra high brightness panels 2,500cd/ m² -3,000cd/ m²



- **METALPLATE**

Metalplate with outdoor powder coating, prevent rust and corrosion resistance

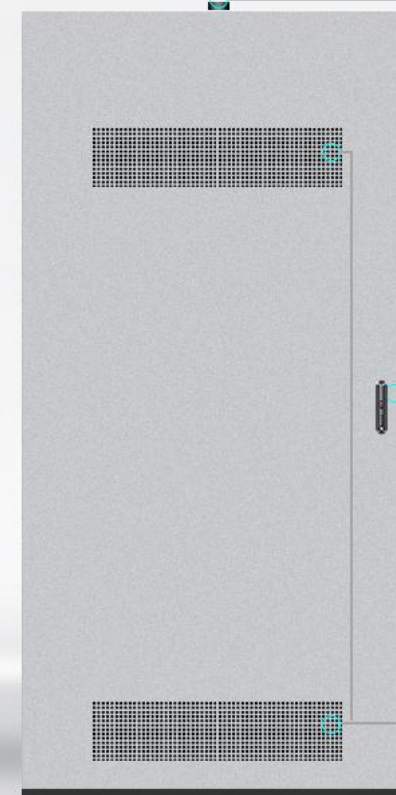

- **Easy and fast network access via LAN or WIFI connection**



- **SECURITY DOOR**
Double-layer design, vandal proof.



- **AUTOMATIC TEMPERATURE CONTROL**

Intelligent fans cooling system with inlet and outlet

OUTSTANDING VISIBILITY WITH HIGH RELIABILITY

*F130P
Outdoor Reliability*

DIRECT SUNLIGHT READABLE


Industrial grade ultra high brightness panels 2,500cd/ m' -3,000cd/ m' can be easily readable in bright weather conditions.



VISIBLE WITH POLARIZED SUNGLASSES

QWP* technology enables clear visibility even when the viewer is wearing polarized sunglasses.

(OPTION) need extra charge

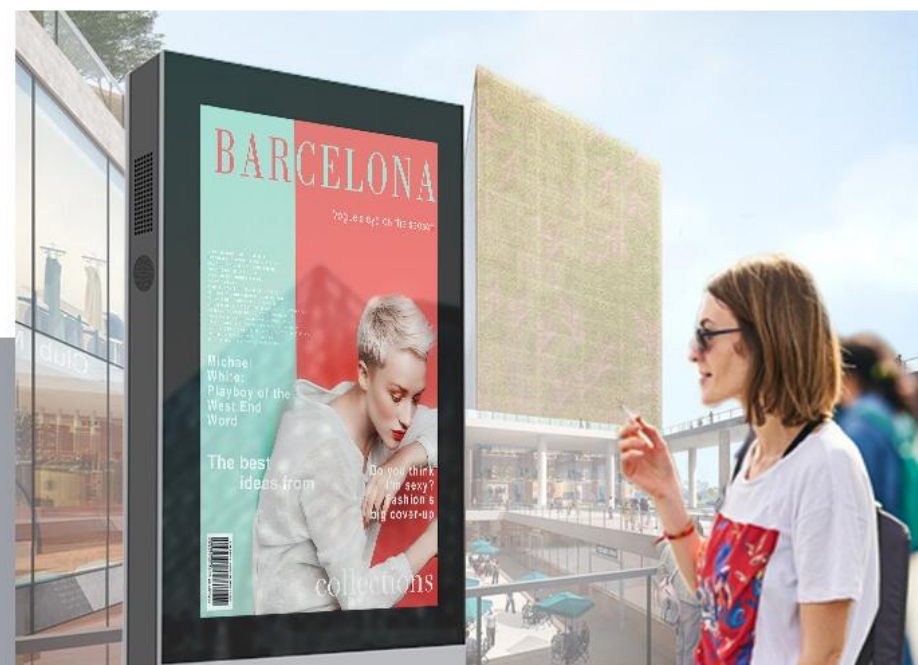


OUTSTANDING VISIBILITY WITH HIGH RELIABILITY

F130P
Outdoor Reliability

AMBIENT LIGHT SENSOR


Light sensor change the screen's brightness depending on the ambient light ensuring the most suitable brightness at any time of the day.

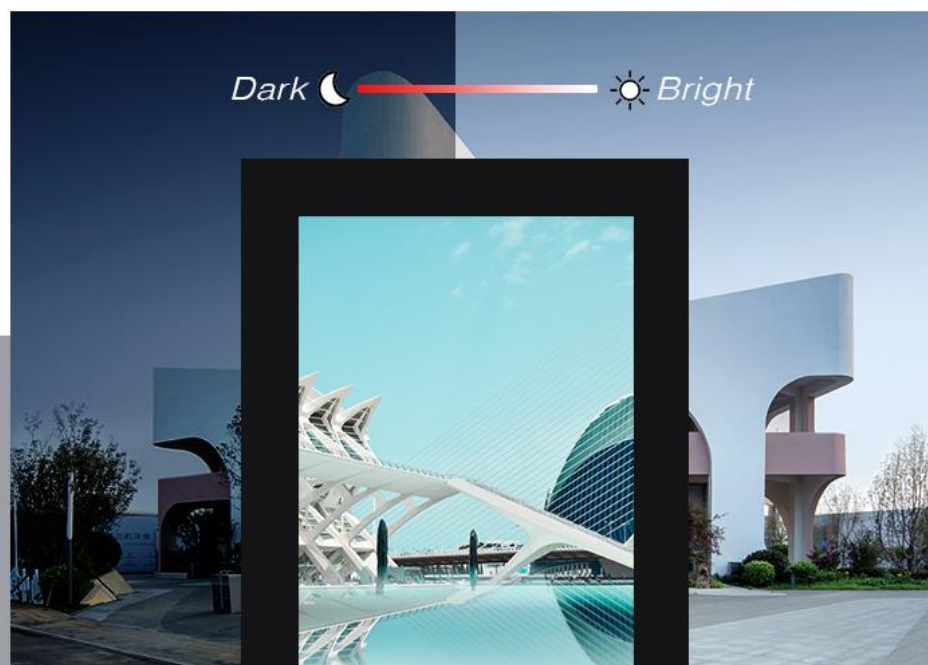

Auto Brightness

NO BLACKENING

Face to direct sunlight, Outdoor All-in-one Smart Digital Signage can resist blackening in up to 110°C displaying images clearly, while the conventional screen can only resist blackening in 70°C.

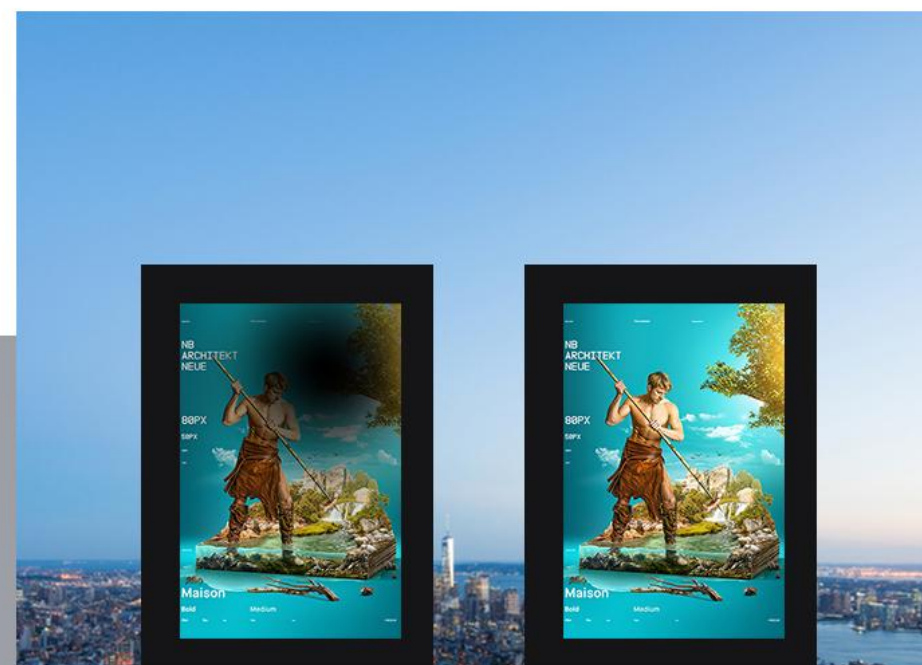

Conventional

F130P

OUTSTANDING VISIBILITY WITH HIGH RELIABILITY

F130P

Outdoor Reliability

IP65 RATED ENCLOSURE


The display with IP65 rating is able to withstand all wet weather conditions and keep out airborne dust.

Air conditioner cooling system is IP65, Temperature control fan is IP55



CONFORMAL COATING

The product can be often unavoidably exposed to dust and water during maintenance. Conformal coating on every major circuit board protects against dust, iron powder, humidity, etc.

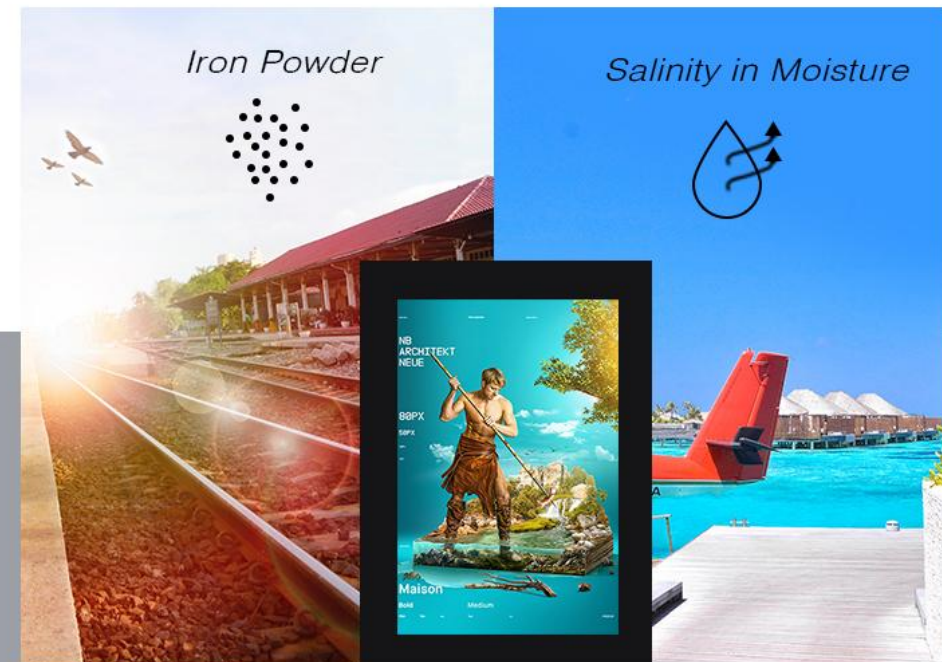

OUTSTANDING VISIBILITY WITH HIGH RELIABILITY

F130P

Outdoor Reliability

ELECTRICAL SAFETY

An electrical circuit breaker and surge suppressor are integrated inside ensuring absolute protection from overcurrent short circuits, and unwanted voltages. This helps prevent equipment damage and safety hazards in the future.

VANDAL-PROOF

The enclosure is made from steel sheet and toughened safety glass. All controls and inputs are hidden and not accessible to passers by to avoid tampering.



Conventional

F130P


OUTSTANDING VISIBILITY WITH HIGH RELIABILITY

F130P

Outdoor Reliability


TEMPERATURE CONTROL SYSTEM

Air cooling system allow the display to work in environment $-20^{\circ} \sim 45^{\circ}$
Air conditioning allow the display to work in any climate $-30^{\circ} \sim 55^{\circ}$.

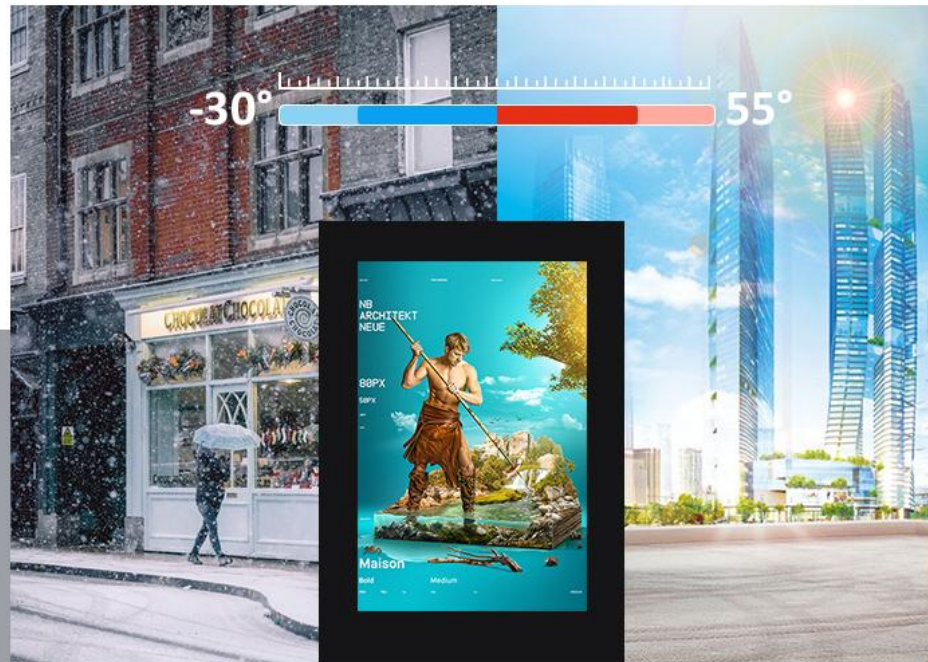

ANTI REFLECTIVE GLASS

AR glass with high transmission and low reflection. Almost 100% of UV is blocked and IR transmission significantly reduced.

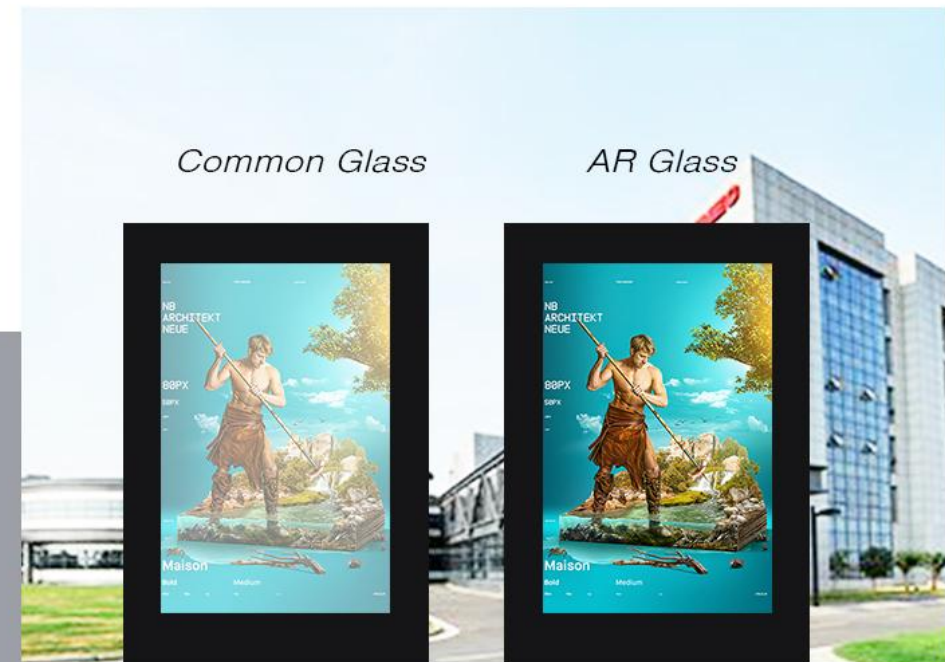

F130P

Outstanding Visiblity with High Reliability

F130P

Outdoor Reliability


INTEGRATED SPEAKERS

Integrated with two stereo speakers for audio element requirement.
10w 8Ω x2 Integrated speakers



FREE SCHEDULING SOFTWARE

Playlist can be scheduled for displaying different content at different times of the day.

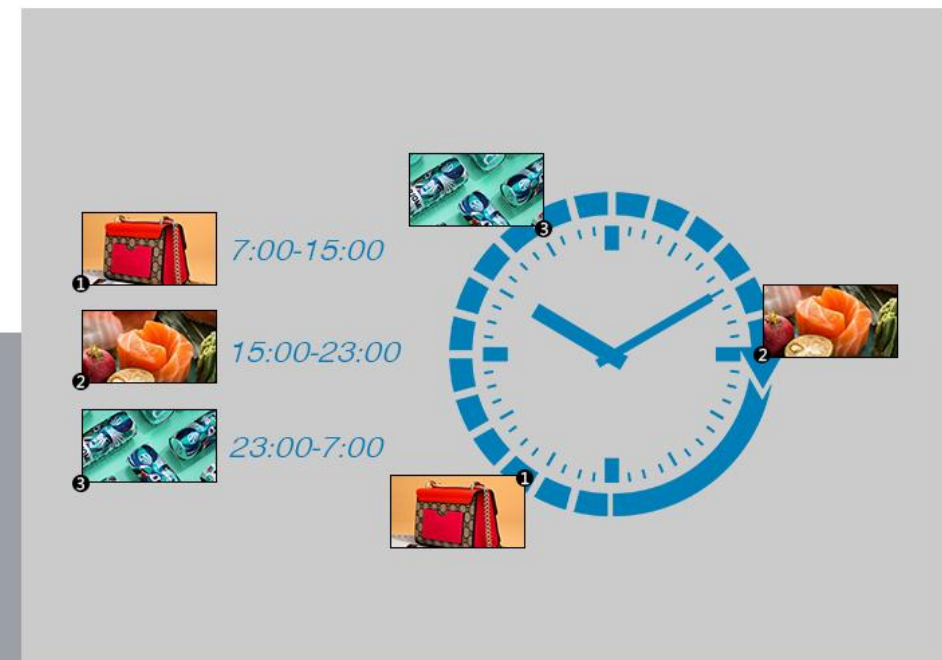

OUTSTANDING VISIBILITY WITH HIGH RELIABILITY

F130P

Outdoor Reliability


POWER TIMER

The screen can be set to automatic daily or weekly timing switches on and off.



24/7 USAGE

The industrial grade panels are able to be in constant use 24/7 for over 60,000 hours.

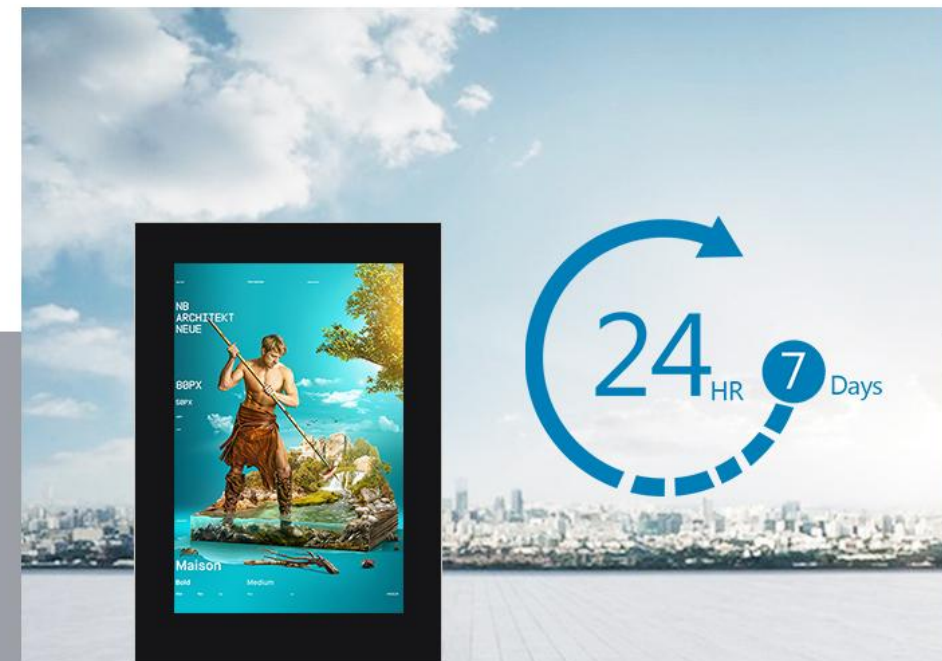

OUTSTANDING VISIBILITY WITH HIGH RELIABILITY

F130P

Outdoor Reliability


NETWORK REMOTE CONTROL

LAN, Wi-Fi, 4G network connection are available. The playlist can be remotely updated over the internet.



ANDROID OR WINDOWS OS

Built in Android operating system and Windows 10 operating system options. You can also use your media player if required.

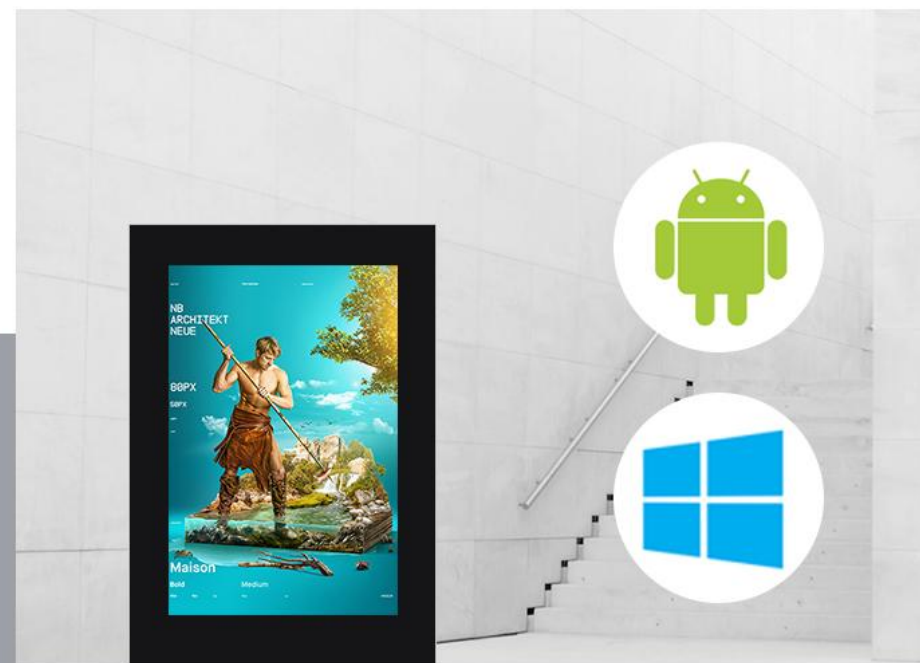

OUTSTANDING VISIBILITY WITH HIGH RELIABILITY

F130P

Outdoor Reliability

WATERPROOF TEST

Time: at least 3 minutes for each outdoor display in laboratory

Aim: to prove that according to IP65 requirement, no water into outdoor display under multi-angle water spray.




ENVIRONMENTAL MONITORING


Environmental monitoring includes kinds of sensors

(light sensor, door opening sensor, humidity sensor, temperature sensor, vibration sensor, ponding sensor, smog sensor) etc


(OPTION) need extra charge

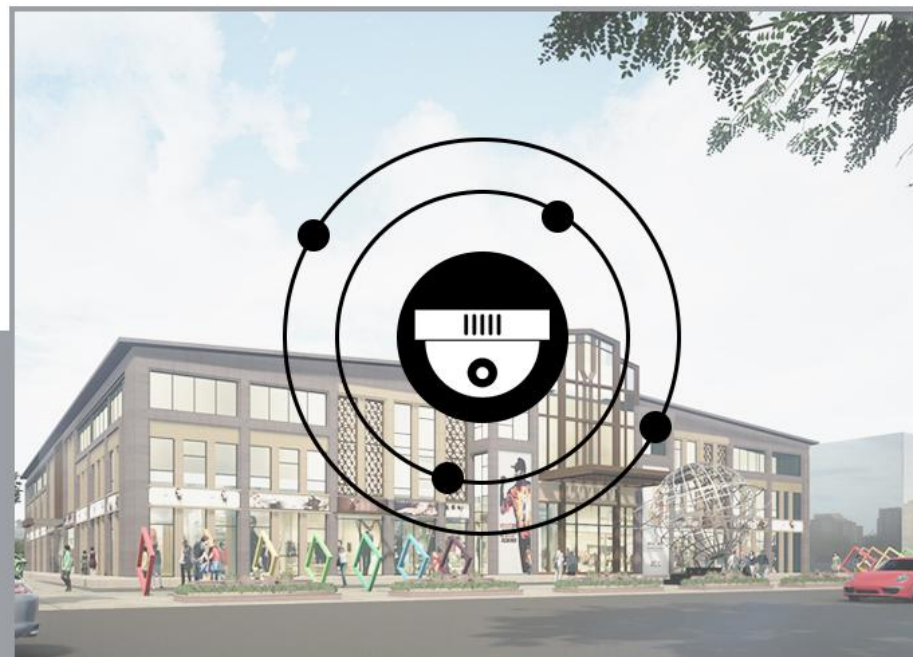

65" CLASS DIMENSION

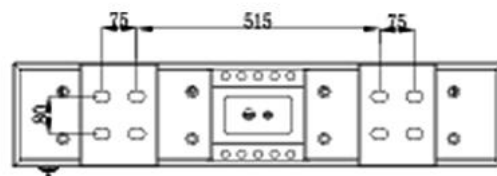

SIZE:
49"/55"/65"/75"/86"

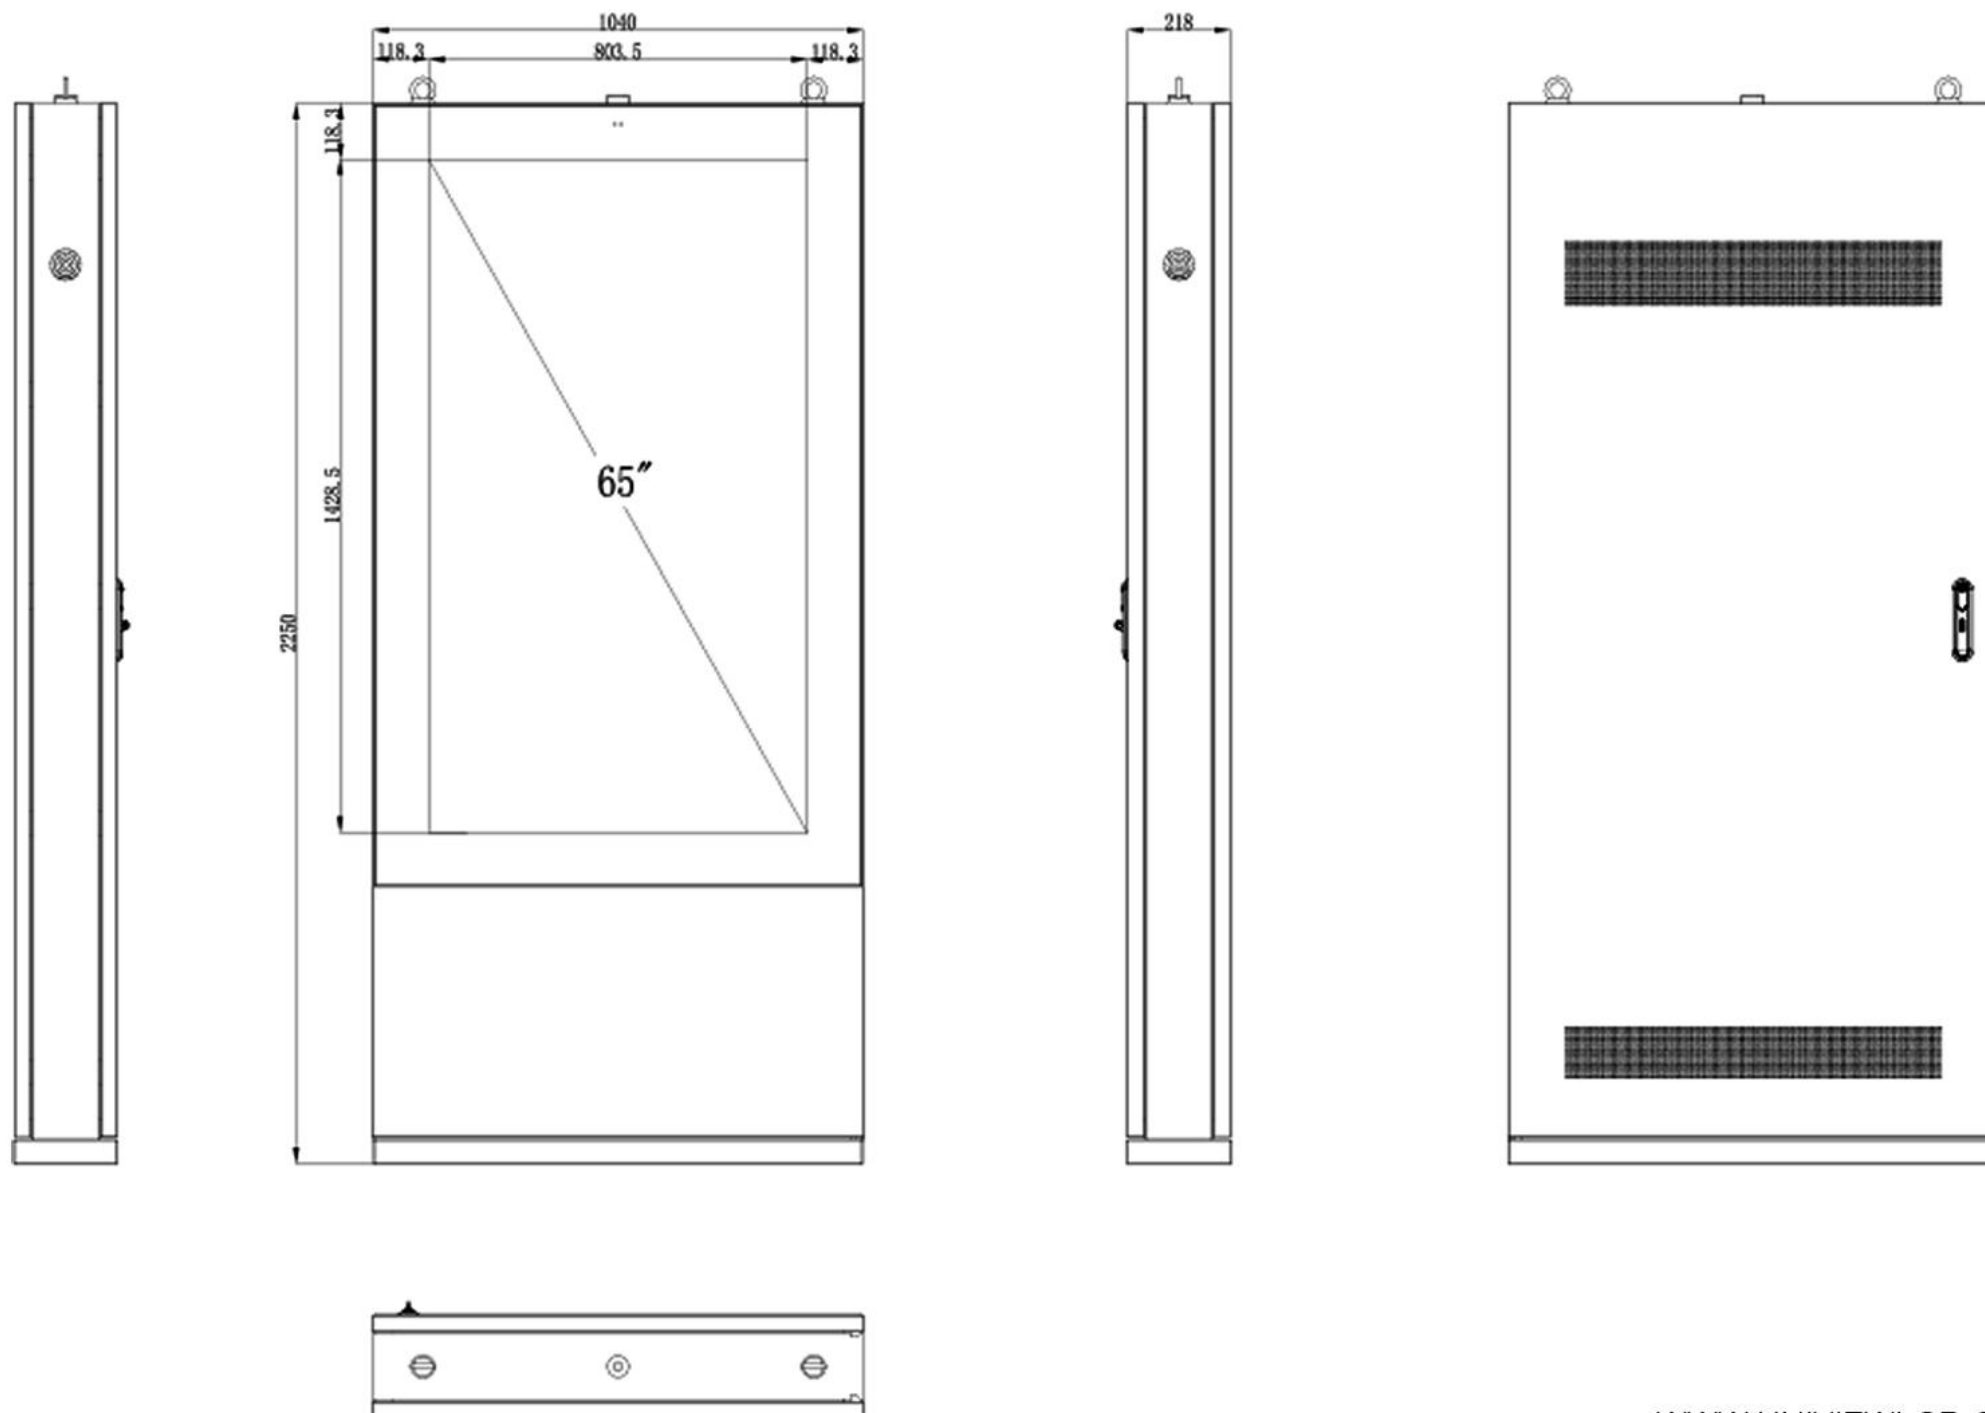

APPLY TO



business street



Living community



HOTEL




Seaside resort



Outdoor restaurant



CBD

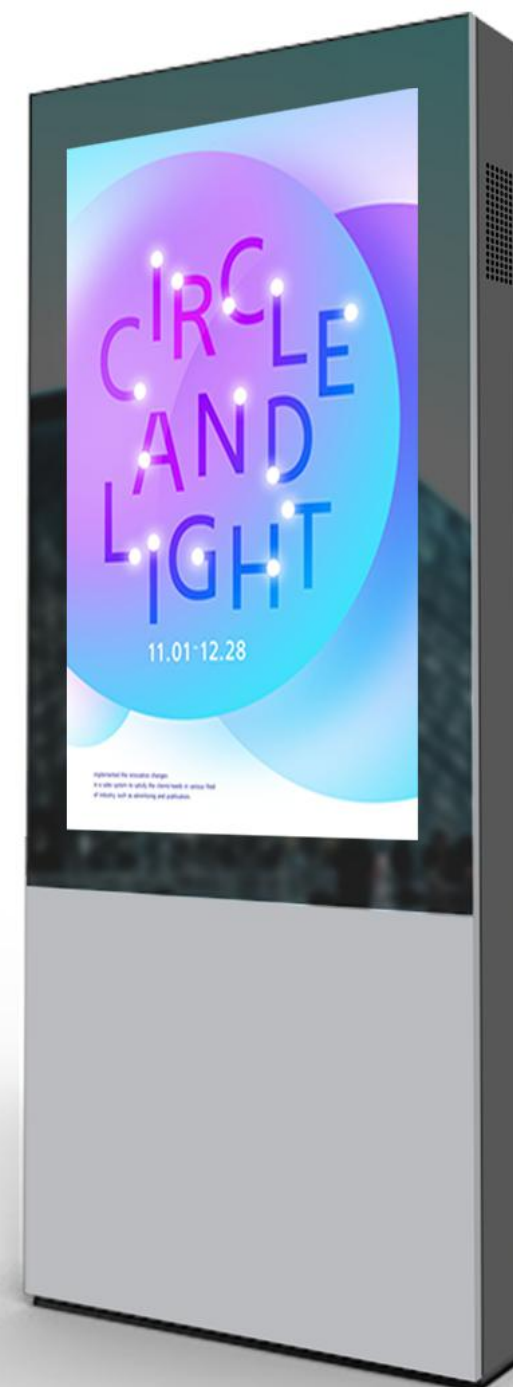

● *SUITABLE FOR A VARIETY OF OUTDOOR VENUES*

WWW.UNIVIEWLCD.COM

OUTDOOR FLOOR STAND KIOSK

ITEM	DETAILS	TECHNICAL PARAMETERS				
Hardware data	Size	49inch	55inch	65inch	75inch	86inch
	Display area (mm)	1084.8x610.2	1209.6x680.4	1428.48x803.52	1650*928	1895*1065
	Resolution	1920x1080/3840x2160				
	Brightness	2500-3000 cd/m ²				
	Viewing angle	178° (H) / 178° (V)				
	Contrast ratio	1300:1				
	Dust poof&Water proof	IP55/IP65				
	Brightness Control	Light sensor				
Power supply	Temperature Control System	Fan cooling system / Air conditioning				
	Switch power	110/240VAC@ 50/60Hz				
Power consumption	Max Power consumption	430W	500W	750W	800W	1500W

ITEM	DETAILS	TECHNICAL PARAMETERS
Android version	Motherboard	RK3288/ RK 3399
	CPU	Cores:4; Basic frequency:1.8 GHz_Cortex A17 / Dual Cortex-A72 big core+quad Cortex-A53 small core 64-bit CPU
	Operating System	Android 5.1/ 7.1
	Graphics	Integrated GPU ARM Mali-T764 / Quad core Arm mali-T860Mp4
	Memory	4G
	Storage	32G
	RJ45 LAN interface	100M/1000M
	USB	4 USB 2.0 / 2 USB 3.0
	Player Software	content management system
	Audio support	Intergrated
	Output interface	HDMI *1
Windows version	Motherboard	H310
	CPU	Intel i5 6th / i7 6th
	Operating System	Windows 10
	Graphics	Intel HD Graphics
	Memory	4G RAM / 8G RAM
	Storage	120G SSD / 256G SSD
	RJ45 LAN interface	100M/1000M
	USB	USB*1, SD card*1
	Audio support	Intergrated
	Output interface	HDMI*1, VGA*1

ITEM	DETAILS	TECHNICAL PARAMETERS
Standalone version	Motherboard	SX-260
	CPU	HD video decoding chip
	Operating System	uCOS
	Memory	DDR 128MB
	Storage	NAND Flash 16G
	Video format	MPEG1, MPEG2, MPEG4, H264, WMV
	USB	USB*1, SD card*1
	Input interface	HDMI*1,USB*1
Driver board version	USB	none
	Audio support	PC audio, earphone input
	input interface	HDMI*1,VGA*1,DVI*1 / HDMI*1,DVI*1,VGA*1,DP*1
Application Environment	Operating temperature	'-20°C ~ +40°C with fans , -30°C ~ +50°C with air conditioner
	Storage temperature	'-20°C ~ +60°C
	Humidity	10-80% RH Non-condensing
Options	WiFi access point	Yes
	Cellular router	3G or 4G
	Touchscreen	capacitive touch
	LED backlit company logo	Yes
	lock caster/wheels	Yes

CUSTOMIZATION



CASTER
OPTIONAL

BASE
OPTIONAL




COLOR IS OPTIONAL

WHEEL



LOGO



CAMERA



TOUCH



MOBILE PHONE
CHARGING



POS



CODE
SCANNER



PRINTER



● CAN BE CUSTOMIZED ACCORDING TO CUSTOMER REQUIREMENTS

WWW.UNIVIEWLCD.COM

UV TESTING

UV TEST:

Time: at least 1 hour for each outdoor display in laboratory

Aim: to prove that outdoor display works well under direct sunlight.

TEMPERATURE TEST:

Time: at least 1 hour for each outdoor display in laboratory

Highest Temperature: +60 °C Lowest Temperature: -20 °C

Aim: to prove that outdoor display works perfectly under extreme temperature.



PRODUCT TEST

WATERPROOF TESTING

WATERPROOF TEST:

Time:

at least 3 minutes for each outdoor display in laboratory

Aim:

to prove that according to IPX5 requirement, no water into outdoor display under multi-angle water spray.



PRODUCT TEST

QUALIFICATION CERTIFICATE




COMPANY OVERVIEW

- Founded in 2011
- Headquarter in Shenzhen, China
- Branch company in Eindhoven, Netherlands
- Specialized in professional LED and LCD display solutions
- Company occupies an area of 10,000 M²

OUR TEAM

01 COMPANY OCCUPIES AN AREA OF 10,000 M²

02 OVER 350 EMPLOYEES

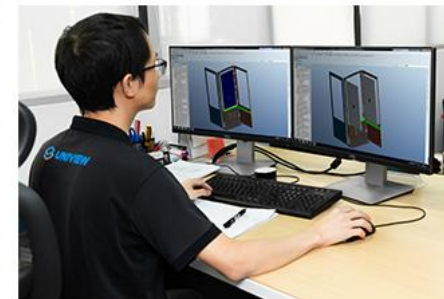

EXHIBITION

● INFOCOMM

Dubai 2016 / Orlando 2017 /
Las Vegas 2018



● ISE Amsterdam 2019 / 2020

● LED CHINA Shanghai 2016 / 2019 / 2020

● PROLIGHT+SOUND Frankfurt 2017

● RDSE London 2018

● DSE Las Vegas 2018


● LDI Las Vegas 2017

WWW.UNIVIEWLCD.COM

PACKING METHOD



FLIGHT CASE

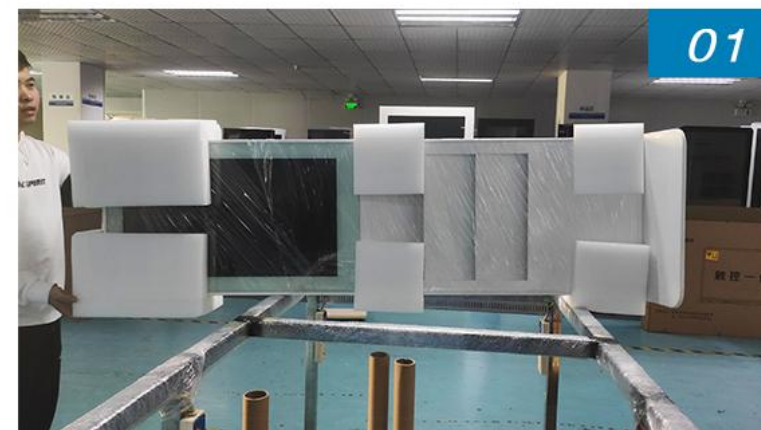

**CARTON
BOX**



**WOODEN
CASE**

CUSTOMER SERVICE

GLOBAL **7X24** SERVICE

