




W1300P

INDOOR WALL MOUNTED DISPLAY





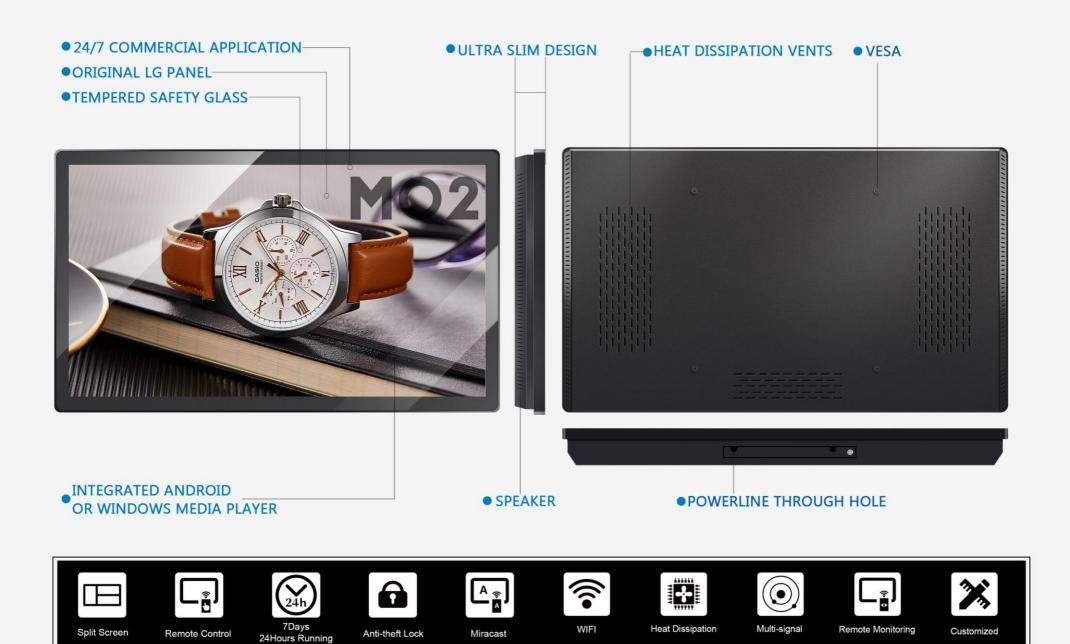













These displays provide fantastic image quality with a remarkable viewing angle of 178° in both landscape and portrait.



You can display a "ticker tapy" style scrolling text message along the bottom of the screen.



AR glass with high transmission and low reflection Almost 100% of UV is blocked and IR transmission significantly reduced.



Light sensor change the screen's brightness depending on the ambient light ensuring the most suitable brightness at any time of the day.

7.INTEGRATED SPEAKERS



Integrated with two stereo speakers for audio element requirement.

8.FREE SCHEDULING SOFTWARE



Playlist can be scheduled for displaying different content at different times of the day.

9.POWER TIMER



The screen can be set to automatic daily of weekly timing switches on and off.

10. 24/7 USAGE



The industrial grade panels are able to be in constant use 24/7 for over 60,000 hours.

11.ANDROID OR WINDOWS OS



Built-in Android 7.1 operating system and Windows 10 operating system options. You can also use your media player if required.

12.NETWORK REMOTE CONTROL



LAN, Wi-Fi, 4G network connection are available. The playlist can be remotely updated over the internet.

APPLICATION













HONOR

AUDITED SUPPLIER











PATENT

























SIZE 65"

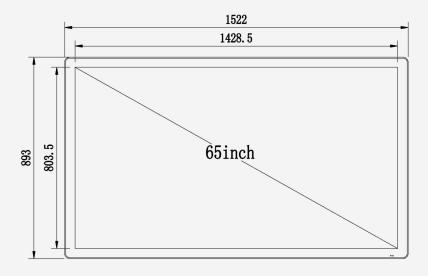



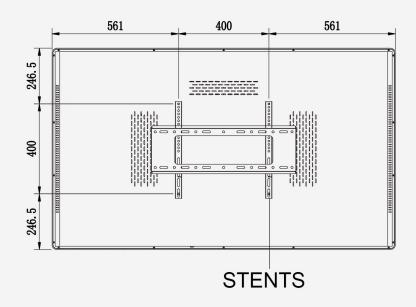

OTHER AVAILABLE SIZES:
32" 43" 49" 55" 65" 75" 86" 98"

CONTENT MANAGEMENT DEVICE MANAGEMENT REMOTE CONTROL









- 1 CARTON BOX
- **2** WOODEN CASE





1FLIGHT CASE




SPECIFICATION

ITEM	DETAILS	TECHNICAL PARAMETERS							
Hardware data	Size	32inch	43inch	49inch	55inch	65inch	75inch	86inch	98inch
	Display area (mm)	698.4*392.85	941.1*529.4	1084.8x610.2	1209.6x680.4	1428.48×803.52	1649.66× 927.93	1895.04× 1065.96	2158.85×1214.35
	Referent dimension(H*W*T mm)	783*478*86	1023*609*86	1160*690*86	1296*769*86	1522*893*86	1767*1042*110	1980*1160*110	2241*1297*110
	Resolution	1920x1080 / 3840x2160							
	Brightness	$350 \text{ cd/m}^2 / 500 \text{ cd/m}^2 / 700 \text{ cd/m}^2 / 1000 \text{ cd/m}^2$							
	Viewing angle	178° (H) / 178° (V)							
	Contrast ratio	1400:1							
	Shell material	aluminum profile, metal plate, tempered safety glass							
	Spearker	2X8Ω5W							
Power supply	Switch power	110-240VAC@ 50/60Hz							
Power consumption	Max Power consumption	40W	55W	60W	80W	140W	245W	285W	485W

HEM	DETAILS	TECHNICAL PARAMETERS				
	Motherboard	RK3288/ RK 3399				
	CPU	Cores:4; Basic frequency:1.8 GHz ,Cortex A17 / Dual Cortex-A72 big core+quad Cortex-A53 small core 64-bit CPU				
	Operating System	Android 5.1/ 7.1				
	Graphics	Integrated GPU ARM Mali-T764 / Quad core Arm mali-T860Mp4				
	Memory	2G				
Android version	Storage	16G				
	RJ45 LAN interface	100M/1000M				
	USB	4 USB 2.0 / 2 USB 3.0				
	Player Software	content management system				
	Audio support	Intergrated				
	Output interface	HDMI *1				
	Motherboard	H110				
	CPU	Intel i5 ≥6th generation(i3 & i7 for option)				
	Operating System	Windows 10 Pro				
	Graphics	Intel HD Graphics				
	Memory	4G RAM				
Windows version	Storage	120G SSD				
Williad Walter Terraid II	RJ45 LAN interface	100M/1000M				
	USB	USB*1, SD card*1				
	Player Software	To be specified by the client				
	Audio support	Intergrated				
	Output interface	HDMI*1, VGA*1				

ITEM	DETAILS	TECHNICAL PARAMETERS			
	Motherboard	SX-260			
	CPU	HD video decoding chip			
	Operating System	uCOS			
	Memory	DDR 128MB			
Standalone	Storage	NAND Flash 16G			
version	Video format	MPEG1, MPEG2, MPEG4, H264, WMV			
	USB	USB*1, SD card*1			
	Input interface	HDMI*1,USB*1			
	USB	none			
Driver board version	Audio support	PC audio, earphone input			
Dodra version	input interface	HDMI*1,VGA*1,DVI*1 / HDMI*1,DVI*1,VGA*1,DP*1			
	Operating temperature	0° C \sim +40 $^{\circ}$ C			
Application	Storage temperature	-20°C ∼ +60°C			
Environment	Humidity	10-80% RH Non-condensing			
	WiFi access point	Yes			
Options	Cellular router	3G or 4G			
Options	Touchscreen	capacitive touch			
	LED backlit company logo	Yes			



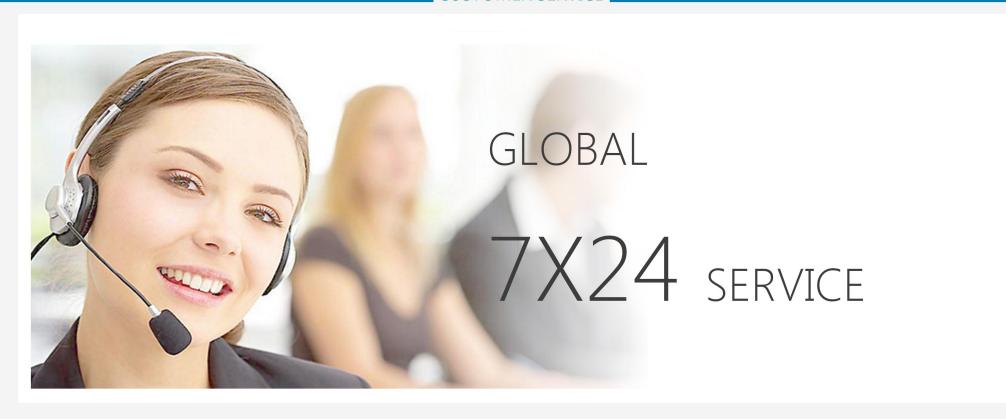



REMOTE TECHNICAL SUPPORT

